

Elastomer Bellows Mechanical Seals

... HM150A

● Operational Conditions:

Temperature: -40℃ to +150℃

Pressure: ≤ 1.2MPa

Speed: ≤ 15m/s

● Materials:



Stationary Ring: Q2, B, V1

Rotary Ring: Q2, B, U2

Secondary Seal: P, E, V

Spring and Metal Parts: F, G

- Applications: Clean water, sewage water, Oil and other moderately corrosive fluids.

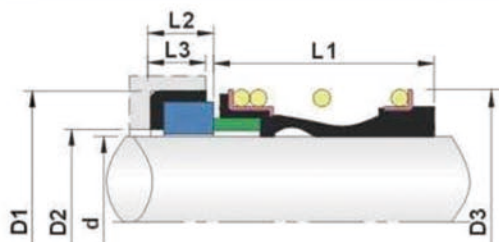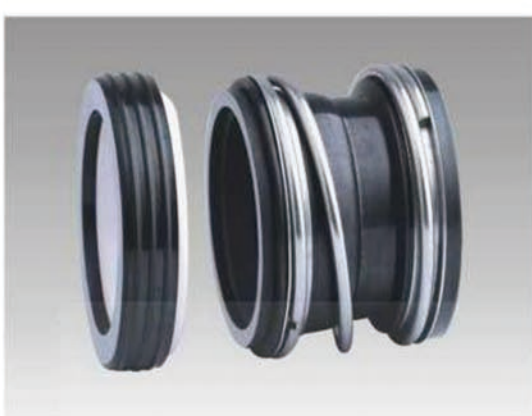

规格/Size (英制/Inch)	D1	D2	D3	L1	L2	L3
0.375	24.60	16.00	20.0	25.40	8.74	7.47
0.500	27.79	19.05	22.0	25.40	8.74	7.47
0.625	30.95	22.23	26.0	25.40	10.32	8.97
0.750	34.15	25.40	32.0	25.40	10.32	8.97
0.875	37.30	28.58	36.0	25.40	10.32	8.97
1.000	40.50	31.75	39.0	25.40	10.32	8.97
1.125	47.63	35.72	42.0	33.34	11.99	10.46
1.250	50.80	38.89	46.0	33.34	11.99	10.46
1.375	53.98	42.07	49.0	33.34	11.99	10.46
1.500	57.15	45.24	54.0	33.34	11.99	10.46
1.625	60.35	48.42	56.0	33.34	11.99	10.46
1.750	63.50	51.59	61.0	40.48	11.99	10.46
1.875	66.70	54.75	64.0	40.48	11.99	10.46
2.000	69.85	58.00	66.0	40.48	13.50	11.96
2.125	73.05	62.00	69.0	41.00	13.50	11.96
2.250	76.20	65.00	78.0	41.00	13.50	11.96
2.375	79.40	68.00	80.0	41.00	13.50	11.96
2.500	82.55	71.20	83.0	41.00	13.50	11.96
2.625	92.10	78.35	85.0	49.00	15.90	14.50
2.750	95.25	81.10	90.0	49.00	15.90	14.50
2.875	98.45	84.50	96.0	49.00	15.90	14.50
3.000	101.65	88.10	99.0	49.00	15.90	14.50
3.125	111.15	93.68	104.0	56.00	20.00	18.50
3.250	114.30	96.85	104.0	56.00	20.00	18.50
3.375	117.50	100.00	109.0	56.00	20.00	18.50
3.500	120.65	103.18	114.0	56.00	20.00	18.50
3.625	123.85	106.35	114.0	59.00	20.00	18.50
3.750	127.00	109.52	119.0	59.00	20.00	18.50
3.875	130.20	112.65	122.0	62.00	20.00	18.50
4.000	133.35	115.88	124.0	62.00	20.00	18.50