


HM104U

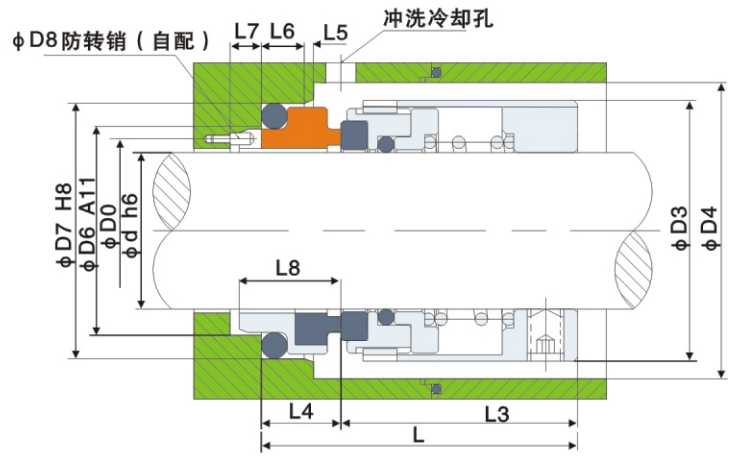

技术参数

- ▶ 密封介质: 水、海水、酸、碱、苯等
- ▶ 速度: $\leq 3000\text{r/min}$
- ▶ 适用温度: $-20^{\circ}\text{C} \sim +180^{\circ}\text{C}$
- ▶ 适用压力: $0 \sim 1.0\text{Mpa}$

Technical Parameters
sealing medium sewage acid, seawater and other
neutral corrosive liquid with granules
Medium temperature: $-20^{\circ}\text{C} \sim 180^{\circ}\text{C}$
velocity $\leq 3000\text{r/min}$

Model	d	D3	D4	D6	D7	D8	D ₀	L	L3	L4	L5	L6	L7	L8
HM104U-16	16	33	36	25	33	2	21	49	37	2	1.5	5.5	7.0	16
HM104U-18	18	35	38	28	36	2	23	52	40	12	1.5	5.5	7.0	16
HM104U-20	20	37	40	30	40	3	25	54	40	14	2.0	6.5	8.0	19
HM104U-22	22	39	42	32	42	3	27	57	43	14	2.0	6.5	8.0	19
HM104U-25	25	42	45	35	45	3	30	57	43	14	2.0	6.5	8.0	19
HM104U-28	28	45	48	38	48	3	33	58	44	14	2.0	6.5	8.0	19
HM104U-30	30	52	55	40	50	3	35	63	49	14	2.0	6.5	8.0	19
HM104U-35	35	57	60	45	55	3	40	65	51	14	2.0	6.5	8.0	19
HM104U-40	40	62	65	50	60	3	45	68	54	14	2.0	6.5	8.0	19
HM104U-45	45	67	70	55	65	3	50	74	60	14	2.0	6.5	8.0	19
HM104U-50	50	72	75	60	70	3	55	77	63	14	2.5	6.5	8.0	19
HM104U-55	55	77	80	65	75	3	60	79	65	14	2.5	6.5	8.0	19
HM104U-60	60	82	85	70	80	3	65	79	65	14	2.5	6.5	8.0	19
HM104U-65	65	92	95	80	90	3	73	91	74	17	2.5	6.5	8.0	22
HM104U-70	70	97	100	85	97	3	78	95	76	19	2.5	7.5	9.0	25
HM104U-75	75	102	105	90	102	3	83	95	76	19	3.0	7.5	9.0	25
HM104U-80	80	107	110	95	107	3	88	100	81	19	3.0	7.5	9.0	25
HM104U-85	85	112	115	100	112	3	93	101	82	19	3.0	7.5	9.0	25
HM104U-90	90	117	120	105	117	3	98	102	83	19	3.0	7.5	9.0	25
HM104U-95	95	122	125	110	122	3	103	102	83	19	3.0	7.5	9.0	25
HM104U-100	100	127	130	115	127	3	108	102	83	19	3.0	7.5	9.0	25
HM104U-110	110	141	145	130	142	3	120	126	105	21	3.0	8.0	9.0	27
HM104U-120	120	151	155	140	152	3	130	126	105	21	3.0	8.0	9.0	27