


HMH74D

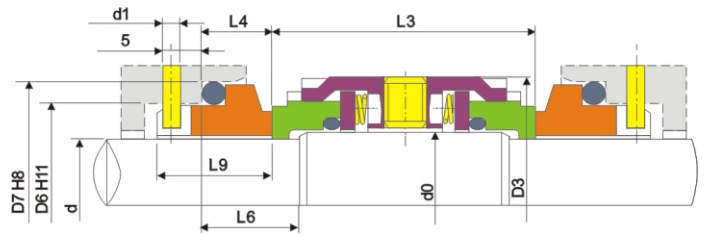

O-ring Mechanical Series

Operational Conditions:

Temperature: -20°C to $+180^{\circ}\text{C}$
 Pressure: $\leq 2.5\text{MPa}$
 Speed: $\leq 15\text{m/s}$

Materials:

Stationary Ring: V1, Q1, Q2, U2, B, A
 Rotary Ring: B, A, Q1, Q2, U2
 Secondary Seal: P, E, V, M1, M2
 Spring and Metal Parts: F, G, M

Seat Type:

Standard: HMG92
 Alternative: HMG9, HMG4, HMG6

Applications: Clean water, sewage water, oil and other moderately corrosive fluids.

Model	d	d0	D3	D6	D7	d1	L6	L3	L4	L9
HMH74D-14	14	18	33	21	25	3	18	53.0	10.0	17.5
HMH74D-16	16	20	35	23	27	3	18	53.0	10.0	17.5
HMH74D-18	18	22	37	27	33	3	20	53.0	11.5	19.5
HMH74D-20	20	24	39	29	35	3	20	53.0	11.5	19.5
HMH74D-22	22	26	41	31	37	3	20	53.0	11.5	19.5
HMH74D-24	24	28	43	33	39	3	20	54.0	11.5	19.5
HMH74D-25	25	30	45	34	40	3	20	54.0	11.5	19.5
HMH74D-28	28	33	48	37	43	3	20	54.0	11.5	19.5
HMH74D-30	30	35	50	39	45	3	20	54.0	11.5	19.5
HMH74D-32	32	38	55	42	48	3	20	56.0	11.5	19.5
HMH74D-33	33	38	55	42	48	3	20	56.0	11.5	19.5
HMH74D-35	35	40	57	44	50	3	20	57.0	11.5	19.5
HMH74D-38	38	43	60	49	58	4	23	57.0	14.0	22.0
HMH74D-40	40	45	62	51	58	4	23	57.0	14.0	22.0
HMH74D-43	43	48	65	54	61	4	23	57.0	14.0	22.0
HMH74D-45	45	50	67	56	63	4	23	56.0	14.0	22.0
HMH74D-48	48	53	70	59	65	4	23	56.0	14.0	22.0
HMH74D-50	50	55	72	62	70	4	25	63.0	15.0	23.0
HMH74D-53	53	58	79	65	73	4	25	67.0	15.0	23.0
HMH74D-55	55	60	81	67	75	4	25	67.0	15.0	23.0
HMH74D-58	58	63	84	70	78	4	25	74.0	15.0	23.0
HMH74D-60	60	65	86	72	80	4	25	74.0	15.0	23.0
HMH74D-63	63	68	89	75	83	4	25	79.0	15.0	23.0
HMH74D-65	65	70	91	77	85	4	25	68.0	15.0	23.0
HMH74D-70	70	75	99	83	92	4	28	76.4	18.0	26.0
HMH74D-75	75	80	104	88	97	4	28	76.4	18.0	26.0
HMH74D-80	80	85	109	95	105	4	28	76.0	18.2	26.2
HMH74D-85	85	90	114	100	110	4	28	76.0	18.2	26.2
HMH74D-90	90	95	119	105	115	4	28	76.0	18.2	26.2
HMH74D-95	95	100	124	110	120	4	28	76.0	17.2	25.2
HMH74D-100	100	105	129	115	125	4	28	76.0	17.2	25.2