
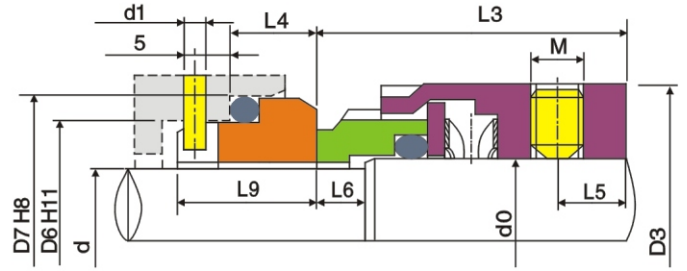


HMH7N

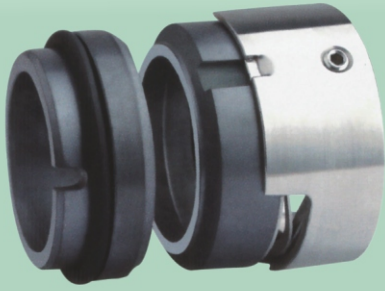

O-ring Mechanical Series

Operational Conditions:
Temperature: -20°C to $+180^{\circ}\text{C}$
Pressure: $\leq 2.5\text{MPa}$
Speed: $\leq 15\text{m/s}$

Materials:
Stationary Ring: V1, Q1, Q2, U2, B, A
Rotary Ring: B, A, Q1, Q2, U2
Secondary Seal: P, E, V, M1, M2
Spring and Metal Parts: F, G, M

Seat Type:
Standard: HMG9
Alternative: HMG92
Applications: Clean water, sewage water, oil and other moderately corrosive fluids.

Model	d	d0	D3	D6	D7	d1	L3	L4	L9	L6	M
HMH7N-14	14	18	33	21	25	3	32.5	10.0	17.5	8.0	M5
HMH7N-16	16	20	35	23	27	3	32.5	10.0	17.5	8.0	M5
HMH7N-18	18	22	37	27	33	3	33.5	11.5	19.5	8.5	M5
HMH7N-20	20	24	39	29	35	3	33.5	11.5	19.5	8.5	M5
HMH7N-22	22	26	41	31	37	3	33.5	11.5	19.5	8.5	M5
HMH7N-24	24	28	43	33	39	3	36.0	11.5	19.5	8.5	M6
HMH7N-25	25	30	45	34	40	3	36.0	11.5	19.5	8.5	M6
HMH7N-28	28	33	48	37	43	3	38.5	11.5	19.5	8.5	M6
HMH7N-30	30	35	50	39	45	3	38.5	11.5	19.5	8.5	M6
HMH7N-32	32	38	55	42	48	3	38.5	11.5	19.5	8.5	M5
HMH7N-33	33	38	55	42	48	3	38.5	11.5	19.5	8.5	M6
HMH7N-35	35	40	57	44	50	3	38.5	11.5	19.5	8.5	M6
HMH7N-38	38	43	60	49	56	4	38.5	14.0	22.0	9.0	M6
HMH7N-40	40	45	62	51	58	4	38.5	14.0	22.0	9.0	M6
HMH7N-43	43	48	65	54	61	4	38.5	14.0	22.0	9.0	M6
HMH7N-45	45	50	67	56	63	4	38.5	14.0	22.0	9.0	M6
HMH7N-48	48	53	70	59	66	4	38.5	14.0	22.0	9.0	M6
HMH7N-50	50	55	72	62	70	4	42.5	15.0	23.0	10.0	M6
HMH7N-53	53	58	79	65	73	4	42.5	15.0	23.0	10.0	M8
HMH7N-55	55	60	81	67	75	4	42.5	15.0	23.0	10.0	M8
HMH7N-58	58	63	84	70	78	4	47.5	15.0	23.0	10.0	M8
HMH7N-60	60	65	86	72	80	4	47.5	15.0	23.0	10.0	M8
HMH7N-63	63	68	89	75	83	4	47.5	15.0	23.0	10.0	M8
HMH7N-65	65	70	91	77	85	4	47.5	15.0	23.0	10.0	M8
HMH7N-70	70	75	99	83	92	4	52.0	18.0	26.0	10.0	M8
HMH7N-75	75	80	104	88	97	4	52.0	18.0	26.0	10.0	M8
HMH7N-80	80	85	109	95	105	4	51.8	18.2	26.2	9.8	M8
HMH7N-85	85	90	114	100	110	4	56.8	18.2	26.2	9.8	M8
HMH7N-90	90	95	119	105	115	4	56.8	18.2	26.2	9.8	M8
HMH7N-95	95	100	124	110	120	4	57.8	17.2	25.2	10.8	M8
HMH7N-100	100	105	129	115	125	4	57.8	17.2	25.2	10.8	M8