


HMW02

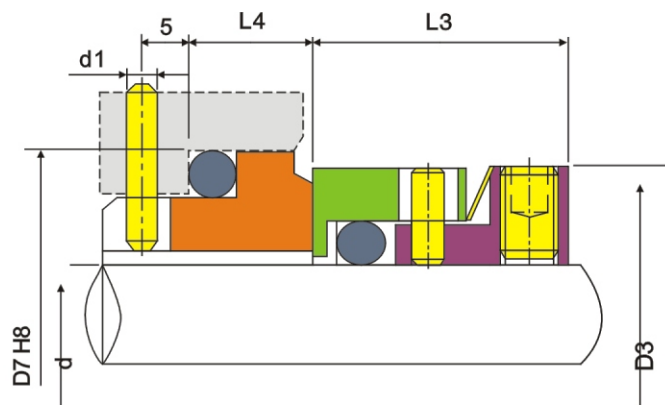

O-ring Mechanical Series

► Operational Conditions:
Temperature: -40°C to $+200^{\circ}\text{C}$
Pressure: $\leq 0.8\text{MPa}$
Speed: $\leq 18\text{m/s}$

► Materials:
Stationary Ring: Q2, U2, B
Rotary Ring: U2, F
Secondary Seal: P, E, V
Spring and Metal Parts: F, G

► Applications: Clean water, sewage water, oil and other moderately corrosive fluids.

Model	d	D7	D3	d1	L3	L4
HMW02—16	16	27	27.0	4.00	19.10	8.60
HMW02—20	20	35	31.0	5.00	19.10	10.00
HMW02—22	22	37	33.0	5.00	19.10	10.00
HMW02—24	24	39	34.1	5.00	19.10	10.00
HMW02—25	25	40	35.2	5.00	19.10	10.00
HMW02—28	28	43	40.0	5.00	19.10	10.00
HMW02—30	30	45	41.0	5.00	19.10	10.00
HMW02—32	32	48	42.4	5.00	19.10	10.00
HMW02—33	33	48	44.0	5.00	19.10	10.00
HMW02—35	35	50	45.5	5.00	19.10	10.00
HMW02—38	38	56	51.8	5.00	21.10	11.00
HMW02—40	40	58	53.8	5.00	21.10	11.00
HMW02—43	43	61	56.0	5.00	21.10	11.00
HMW02—45	45	63	58.2	5.00	21.10	11.00
HMW02—48	48	66	61.4	5.00	21.10	11.00
HMW02—50	50	70	61.9	5.00	21.10	13.00
HMW02—55	55	75	72.0	5.00	22.10	13.00
HMW02—60	60	80	76.0	5.00	25.80	13.00
HMW02—63	63	83	79.3	5.00	25.80	13.00
HMW02—65	65	85	82.3	5.00	25.80	13.00
HMW02—70	70	92	88.9	5.00	25.80	15.30
HMW02—75	75	97	96.0	5.00	25.80	15.30