



HM1527

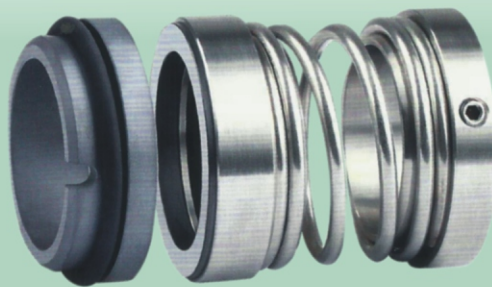

O-ring Mechanical Series

- Operational Conditions:
Temperature: -20°C to +180°C
Pressure: ≤ 1.0MPa
Speed: ≤ 15m/s
- Materials:
Stationary Ring: V1, Q1, UQ, U2
Rotary Ring: B, A, U2, Q2
Secondary Seal: P, E, V,
Spring and Metal Parts: F, G, M
- Seat Type:
Standard: HM240INL
Alternative: HMG6, HMG9
- Applications: Clean water,
sewage water, oil and other
moderately corrosive fluids.

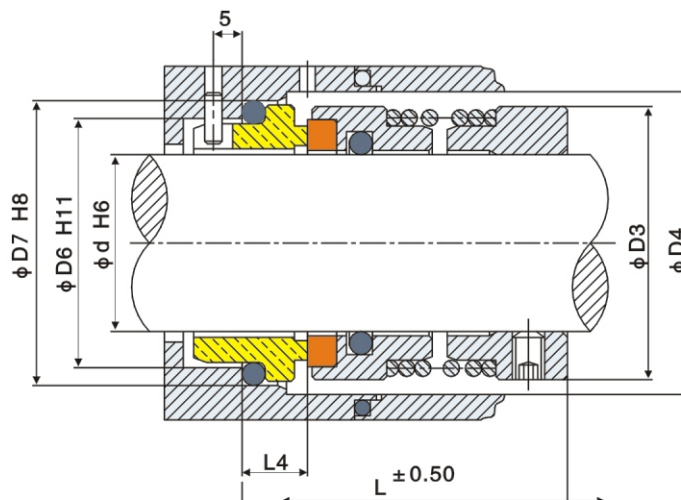

Model	d	D3	D4	D6	D7	L	L4
Hm1527—18	18	32	34	27	33	45	10
Hm1527—20	20	34	36	29	35	45	10
Hm1527—22	22	36	38	31	37	45	10
Hm1527—24	24	38	40	33	39	50	10
Hm1527—25	25	39	41	34	40	50	10
Hm1527—28	28	42	44	37	43	50	10
Hm1527—30	30	44	46	39	45	50	10
Hm1527—32	32	46	48	42	48	55	10
Hm1527—33	33	47	49	42	48	55	10
Hm1527—35	35	49	51	44	50	55	10
Hm1527—38	38	54	58	49	56	55	11
Hm1527—40	40	56	61	51	58	55	11
Hm1527—43	43	59	63	54	61	60	11
Hm1527—45	45	61	65	56	63	60	11
Hm1527—48	48	64	68	59	66	60	11
Hm1527—50	50	66	70	62	70	60	13
Hm1527—53	53	69	73	65	73	70	13
Hm1527—55	55	71	75	67	75	70	13
Hm1527—58	58	78	83	70	78	70	13
Hm1527—60	60	80	85	72	80	70	13
Hm1527—63	63	83	88	75	83	70	13
Hm1527—65	65	85	90	77	85	80	13
Hm1527—68	68	88	93	81	90	80	15.3
Hm1527—70	70	90	95	83	92	80	15.3
Hm1527—75	75	99	104	88	97	80	15.3
Hm1527—80	80	104	109	95	105	90	15.7
Hm1527—85	85	109	114	100	110	90	15.7
Hm1527—90	90	114	119	105	115	90	15.7
Hm1527—95	95	119	124	110	120	90	15.7
Hm1527—100	100	124	129	115	125	90	15.7