


HMM2N / M2NT

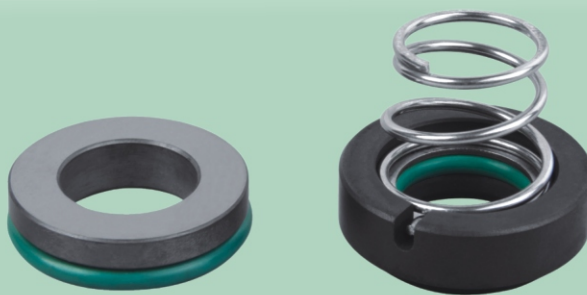


O-ring Mechanical Series

► Operational Conditions:
Temperature: -20°C to +180°C
Pressure: ≤ 1MPa
Speed: ≤ 15m/s

► Materials:
Stationary Ring: V1, Q2, Q1, B
Rotary Ring: B, Q1, Q2
Secondary Seal: V, E, P
Spring and Metal Parts: F, G

► Seat Type:
HM M2N Standard: HMG9
Alternative: HMG6, HMG4

► Applications: Clean water, sewage water, oil and other moderately corrosive fluids.

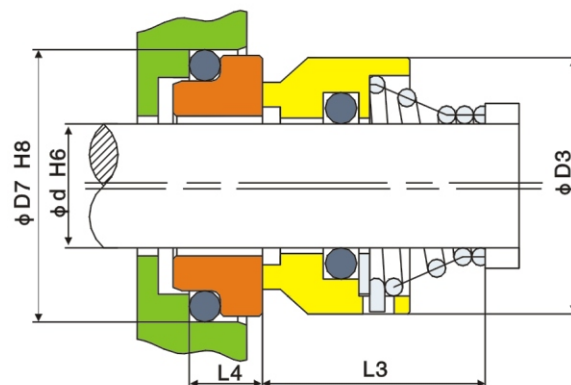

Model	d	D3	D7	L3	L4
HM M2N-10	10	20	21	17.5	10.0
HM M2N-12	12	22	23	17.5	10.0
HM M2N-14	14	25	25	17.5	10.0
HM M2N-16	16	27	27	19.5	10.0
HM M2N-18	18	30	33	20.5	11.5
HM M2N-20	20	32	35	22.0	11.5
HM M2N-22	22	35	37	23.5	11.5
HM M2N-24	24	38	39	25.0	11.5
HM M2N-25	25	40	40	26.5	11.5
HM M2N-28	28	43	43	26.5	11.5
HM M2N-30	30	47	45	25.0	11.5
HM M2N-32	32	48	48	28.5	11.5
HM M2N-35	35	53	50	28.5	11.5
HM M2N-38	38	56	56	30.0	14.0

Model	d	D3	D7	L4	L3
HM M2NT-10	10	20	19.2	7.1	15.5
HM M2NT-12	12	25.5	25.4	7.8	15.2
HM M2NT-16	16	30.0	31.7	10.0	21.0
HM M2NT-19	19	36.0	34.9	8.5	23.5
HM M2NT-25	25	41.5	41.3	9.0	24.0
HM M2NT-25T	25	50.0	41.3	11.5	24.0
HM M2NT-28	28	43.0	43.3	9.0	26.5