
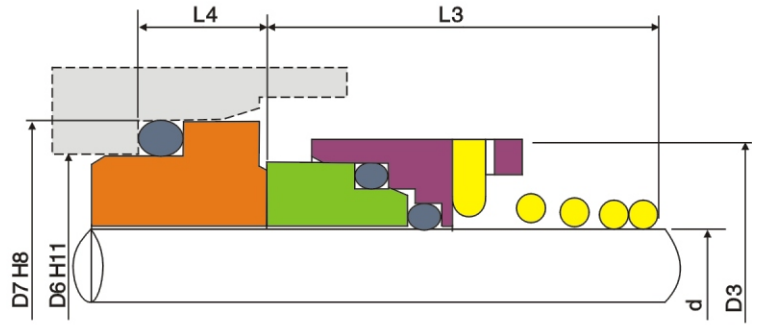


HM7D

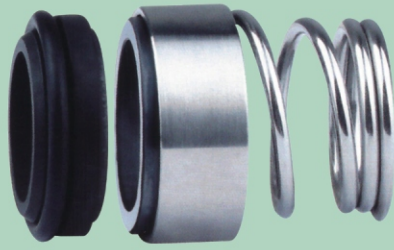

O-ring Mechanical Series

► Operational Conditions:
Temperature: -30°C to +200°C
Pressure: ≤0.8MPa
Speed: ≤18m/s

► Materials:
Stationary Ring: Q2, U2, B
Rotary Ring: Q2, B, U2
Secondary Seal: P, E, V
Spring and Metal Parts: F, G

► Applications: Clean water, sewage water, oil and other moderately corrosive fluids.

Model	d	D7	D6	D3	L3	L4
HM7D-10	10	21.00	17.0	19.00	15.00	7.00
HM7D-12	12	23.00	19.0	21.00	18.00	7.00
HM7D-14	14	25.00	21.0	23.00	22.00	7.00
HM7D-16	16	27.00	23.0	26.00	23.00	7.00
HM7D-18	18	33.00	27.0	29.00	24.00	10.00
HM7D-20	20	35.00	29.0	31.00	25.00	10.00
HM7D-22	22	37.00	31.0	33.00	25.00	10.00
HM7D-24	24	39.00	33.0	35.00	27.00	10.00
HM7D-25	25	40.00	34.0	36.00	27.00	10.00
HM7D-28	28	43.00	37.0	40.00	29.00	10.00
HM7D-30	30	45.00	39.0	43.00	30.00	10.00
HM7D-32	32	48.00	42.0	46.00	30.00	10.00
HM7D-33	33	48.00	42.0	46.00	39.00	10.00
HM7D-35	35	50.00	44.0	49.00	39.00	10.00
HM7D-38	38	56.00	49.0	53.00	42.00	13.00
HM7D-40	40	58.00	51.0	56.00	42.00	13.00
HM7D-43	43	61.00	54.0	59.00	47.00	13.00
HM7D-45	45	63.00	56.0	61.00	47.00	13.00
HM7D-48	48	66.00	59.0	64.00	47.00	13.00
HM7D-50	50	70.00	62.0	66.00	46.00	14.00
HM7D-53	53	73.00	65.0	69.00	56.00	14.00
HM7D-55	55	75.00	67.0	71.00	56.00	14.00
HM7D-58	58	78.00	70.0	76.00	56.00	14.00
HM7D-60	60	80.00	72.0	78.00	56.00	14.00
HM7D-63	63	83.00	75.0	81.00	56.00	14.00
HM7D-65	65	85.00	77.0	84.00	66.00	14.00
HM7D-68	68	90.00	81.0	88.00	64.00	16.00
HM7D-70	70	92.00	83.0	89.60	64.00	16.00
HM7D-75	75	97.00	88.0	98.00	64.00	16.00
HM7D-80	80	105.00	95.0	100.00	72.00	18.00
HM7D-85	85	110.00	100.0	107.50	72.00	18.00
HM7D-90	90	115.00	105.0	111.00	72.00	18.00
HM7D-95	95	120.00	110.0	119.00	72.00	18.00
HM7D-100	100	125.00	115.0	123.80	72.00	18.00