


HM301

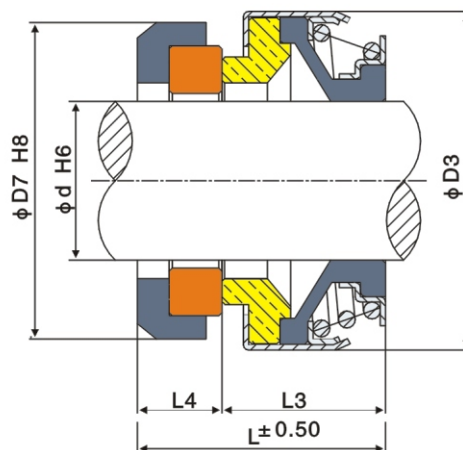

Elastomer Bellow Shaft Seals ▶ 应用范围(Applications)

▶ 压力Pressure: $\leq 0.5\text{MPa}$ ▶ 主要应用于清水泵、循环泵等

温度Temperature: $-20 \sim 100^{\circ}\text{C}$

线速度Speeds: $\leq 10\text{m/sec}$

Used in clean water pumps and circulation pumps.

Model	d	D3	D7	L	L3	L4
HM301-6	6	18.0	22.0	15.0	11.0	4.0
HM301-8	8	18.0	22.0	15.0	11.0	4.0
HM301-8L	8	24.0	26.0	19.0	11.0	8.0
HM301-10	10	24.0	26.0	21.0	13.0	8.0
HM301-11	11	24.0	26.0	21.0	13.0	8.0
HM301-12	12	24.0	26.0	21.0	13.0	8.0
HM301-13	13	24.0	26.0	18.5	13.0	5.5
HM301-14P	14	27.5	28.5	21.0	13.0	8.0
HM301-14	14	32.0	29.5	21.0	13.5	7.5
HM301-15P	15	27.5	30.0	21.0	13.0	8.0
HM301-15	15	32.0	29.5	21.0	13.5	7.5
HM301-16P	16	27.5	30.0	21.0	13.0	8.0
HM301-16	16	32.0	29.5	21.0	13.5	7.5
HM301-16L	16	39.0	42.0	21.0	13.0	8.0
HM301-17	17	39.0	42.0	21.0	13.0	8.0
HM301-18	18	39.0	42.0	21.0	13.0	8.0
HM301-19	19	39.0	42.0	21.0	13.0	8.0
HM301-20P	20	35.0	38.0	21.0	13.0	8.0
HM301-20	20	39.0	42.0	21.0	13.0	8.0
HM301-20L	20	42.0	45.0	23.0	13.0	10.0
HM301-22P	22	39.0	42.0	21.0	13.0	8.0
HM301-22	22	42.0	45.0	23.0	13.0	10.0
HM301-23	23	47.0	50.0	23.5	13.5	10.0
HM301-24	24	47.0	50.0	23.5	13.5	10.0
HM301-25	25	47.0	50.0	23.5	13.5	10.0
HM301-25P	25	42.0	45.0	23.0	13.0	10.0
HM301-26	26	47.0	50.0	23.5	13.5	10.0
HM301-27	27	47.0	50.0	23.5	13.5	10.0
HM301-28	28	54.0	57.0	25.0	15.0	10.0
HM301-30	30	54.0	57.0	25.0	15.0	10.0
HM301-32	32	54.0	57.0	25.0	15.0	10.0
HM301-35	35	60.0	63.0	26.0	16.0	10.0
HM301-38	38	65.0	68.0	30.0	18.0	12.0
HM301-40	40	65.0	68.0	30.0	18.0	12.0
HM301-45	45	70.0	73.0	32.0	20.0	12.0
HM301-50	50	85.0	88.0	38.0	23.0	15.0
HM301-55	55	85.0	88.0	38.0	23.0	15.0
HM301-60	60	105.0	110.0	45.0	30.0	15.0
HM301-65	65	105.0	110.0	45.0	30.0	15.0
HM301-70	70	105.0	110.0	47.0	32.0	15.0