


HM560

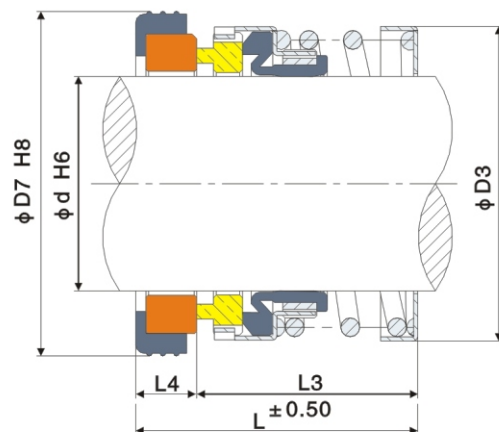

技术参数

- ▶ 压力Pressure: $\leq 0.8\text{MPa}$
- ▶ 线速度Speeds: $\leq 10\text{米/秒}$
- ▶ 温度Temperature: $-40^{\circ}\text{C} \sim +150^{\circ}\text{C}$
- ▶ HM560B等同于Type21
Eivalent to john Crenaty pe21

Model	d	D3	D7	L	L3	L4
HM560A-8	8	17.5	21	18.9	13.9	5.0
HM560A-10	10	23.5	24	23.0	16.5	6.5
HM560A-11	11	23.5	24	23.0	16.5	6.5
HM560A-12	12	26.0	26	24.0	17.5	6.5
HM560A-14	14	28.0	28	25.0	18.0	7.0
HM560A-15	15	28.0	28	25.0	18.0	7.0
HM560A-16	16	30.0	32	27.0	20.0	7.0
HM560A-18	18	32.5	35	26.0	19.0	7.0
HM560A-19	19	32.5	35	26.0	18.0	8.0
HM560A-20	20	35.5	38	28.0	19.5	8.5
HM560A-22	22	37.5	40	28.0	20.0	8.0
HM560A-25	25	42.0	44	29.0	20.0	9.0
HM560A-28	28	45.5	46	30.0	21.0	9.0
HM560A-30	30	48.0	50	31.0	22.0	9.0
HM560A-32	32	50.0	54	33.0	24.0	9.0
HM560A-35	35	54.5	58	36.0	26.0	10.0
HM560A-38	38	58.5	60	37.0	27.0	10.0
HM560A-40	40	62.5	64	38.0	28.0	10.0
HM560A-45	45	66.5	66	40.0	30.0	10.0
HM560A-50	50	72.5	72	42.0	32.0	10.0

Model	d	D3	D7	L	L3	L4
HM560B-3/8"	9.53		22.2	28.5	22.3	6.3
HM560B-1/2"	12.70	23.0	25.4	30.2	22.2	8.0
HM560B-5/8"	15.88	26.5	31.8	32.5	22.2	10.3
HM560B-3/4"	19.05	30.5	35.0	32.5	22.2	10.3
HM560B-7/8"	22.23	34.0	38.1	34.3	24.0	10.3
HM560B-1"	25.40	40.0	41.3	36.4	25.4	11.0
HM560B-1 1/8"	28.58	44.5	44.5	38.0	27.0	11.0
HM560B-1 1/4"	31.75	46.5	47.7	38.0	27.0	11.0
HM560B-1 3/8"	34.93	51.5	50.8	39.5	28.5	11.0
HM560B-1 1/2"	38.10	54.0	54.0	39.5	28.5	11.0
HM560B-1 5/8"	41.28	58.0	60.3	47.7	35.0	12.7
HM560B-1 3/4"	44.45	61.5	63.5	47.7	35.0	12.7
HM560B-1 7/8"	47.63	65.5	66.7	50.7	38.0	12.7
HM560B-2"	50.80	70.5	69.9	50.7	38.0	12.7
HM560B-2 1/8"	53.98	75.0	76.2	57.3	43.0	14.3
HM560B-2 1/4"	57.15	79.0	79.4	57.3	43.0	14.3
HM560B-2 3/8"	60.33	82.0	82.6	60.3	46.0	14.3
HM560B-2 1/2"	63.50	86.0	85.7	60.3	46.0	14.3
HM560B-2 5/8"	66.68	91.5	85.7	65.0	49.0	16.0
HM560B-2 3/4"	69.85	91.5	88.9	65.0	49.0	16.0
HM560B-2 7/8"	73.03	99.0	95.3	68.5	52.5	16.0
HM560B-3	76.20	99.0	98.4	68.5	52.5	16.0