


HM1A

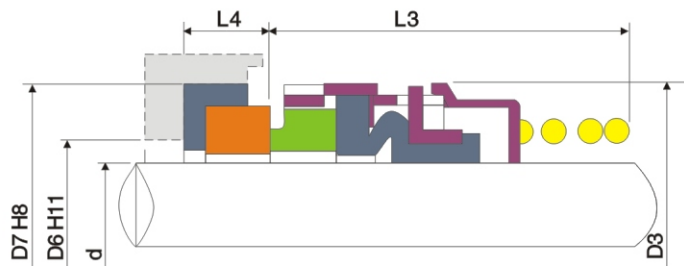

Elastomer Bellow Shaft Seals

► Operational Conditions:
Temperature: -20°C to +120°C
Pressure: ≤ 1.4 MPa
Speed: ≤ 15 m/s

► Materials:
Stationary Ring: V1, Q2, Q1, U2, U1
Rotary Ring: B, A, Q1, Q2, U1, U2
Secondary Seal: P, E, V,
Spring and Metal Parts: F, G

► Applications: Clean water,
sewage water, oil and other
moderately corrosive fluids.

规格/Size (公制/Metric)	d	D3	D6	D7	L3	L4	规格/Size (公制/Metric)	d	D3	L3
0.375	9.5	22	11.0	24.60	44	8.7	14	14	29	44
0.500	12.7	25	13.5	27.80	44	8.7	16	16	29	44
0.625	15.8	29	17.0	30.95	44	10.3	18	18	32	44
0.750	19.0	32	20.0	34.15	44	10.3	19	19	32	44
0.813	20.6	33	21.5	35.70	44	10.3	20	20	33	44
0.875	22.2	35	23.0	37.30	44	10.3	24	24	38	44
1.000	25.4	38	26.5	40.50	44	10.3	25	25	38	44
1.125	28.5	46	29.5	47.65	60	11.9	27	27	46	60
1.250	31.7	49	32.5	50.80	60	11.9	28	28	46	60
1.375	34.9	52	26.5	54.00	60	11.9	29	29	46	60
1.500	38.1	56	39.5	57.15	60	11.9	30	30	49	60
1.625	41.2	59	42.5	60.35	60	11.9	32	32	49	60
1.750	44.4	62	46.0	63.50	71	11.9	34	34	52	60
1.875	47.6	65	49.0	66.70	71	11.9	35	35	52	60
2.000	50.8	68	52.0	69.85	71	13.5	38	38	56	60
2.125	53.9	71	55.5	73.05	71	13.5	40	40	59	60
2.250	57.1	75	58.5	76.20	71	13.5	42	42	62	71
2.375	60.3	78	61.5	79.40	71	13.5	45	45	62	71
2.500	63.5	81	65.0	82.55	71	13.5	48	48	65	71
2.625	66.6	86	68.0	92.10	70	15.9	50	50	68	71
2.750	69.8	89	71.0	95.25	70	15.9	54	54	71	71
2.875	73.0	92	74.5	98.45	73	15.9	55	55	75	71
3.000	76.2	95	77.5	101.60	73	15.9	60	60	78	71
3.125	79.3	102	80.5	111.15	79	19.9	65	65	86	70
3.250	82.5	105	84.0	114.30	79	19.9	70	70	89	70
3.375	85.7	108	87.0	117.50	79	19.9	73	73	92	73
3.500	88.9	111	90.5	120.65	79	19.9	75	75	95	73
3.625	92.0	114	93.5	123.85	83	19.9	80	80	105	79
3.750	95.2	117	96.5	127.00	83	19.9	90	90	114	83
3.875	98.4	121	100.0	130.20	86	19.9	95	95	118	83
4.000	101.6	124	103.0	133.35	86	19.9	100	100	124	86