



HM2B

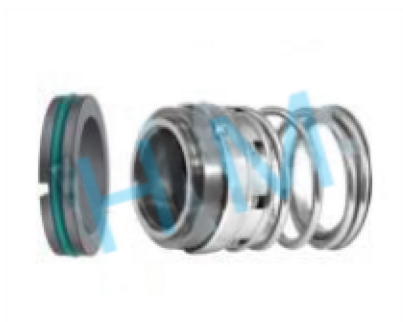

hengmi@mesel.com

Type: Elastomeric bellows mechanical seal
 Replacement: AES PO4U , Crane 2B , Vulcan A4 ,
 Flowserve52
 Temperature: -20°C to +120°C
 Pressure : $\leq 1.4\text{Mpa}$
 Speed: $\leq 15\text{m/s}$
 Material : V,Q1,Q2,U2,U1,B,A,P,E,V,F,G

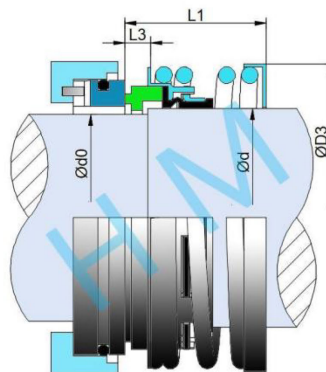

Size (Inch)	d (Inch)	d0	D3	L1	L3
HM2B- 1.000	1.000	0.875	1.812	1.312	0.343
HM2B- 1.125	1.125	1.000	1.937	1.375	0.343
HM2B- 1.25	1.250	1.125	2.062	1.375	0.343
HM2B- 1.375	1.375	1.250	2.250	1.437	0.343
HM2B- 1.500	1.500	1.375	3.375	1.437	0.343
HM2B- 1.625	1.625	1.500	2.718	1.750	0.437
HM2B- 1.750	1.750	1.625	2.750	1.750	0.437
HM2B- 1.875	1.875	1.750	2.875	1.875	0.437
HM2B-2.000	2.000	1.875	3.000	1.875	0.437
HM2B-2.125	2.125	2.000	3.250	2.062	0.500
HM2B-2.250	2.250	2.125	3.375	2.062	0.500
HM2B-2.375	2.375	2.250	3.500	2.187	0.500
HM2B-2.500	2.500	2.375	3.625	2.187	0.500
HM2B-2.625	2.625	2.500	3.875	2.312	0.562
HM2B-2.750	2.750	2.625	4.000	2.312	0.562
HM2B-2.875	2.875	2.750	4.125	2.437	0.562
HM2B-3.000	3.000	2.875	4.250	2.437	0.562
HM2B-3.125	3.125	2.875	4.562	2.562	0.625
HM2B-3.250	3.250	3.000	4.687	2.562	0.625
HM2B-3.375	3.375	3.125	4.812	2.562	0.625
HM2B-3.500	3.500	3.250	4.937	2.562	0.625
HM2B-3.625	3.625	3.375	5.125	2.687	0.625
HM2B-3.750	3.750	3.500	5.250	2.687	0.625
HM2B-3.875	3.875	3.625	5.437	2.812	0.625
HM2B-4.000	4.000	3.750	5.562	2.812	0.625