


HM58U

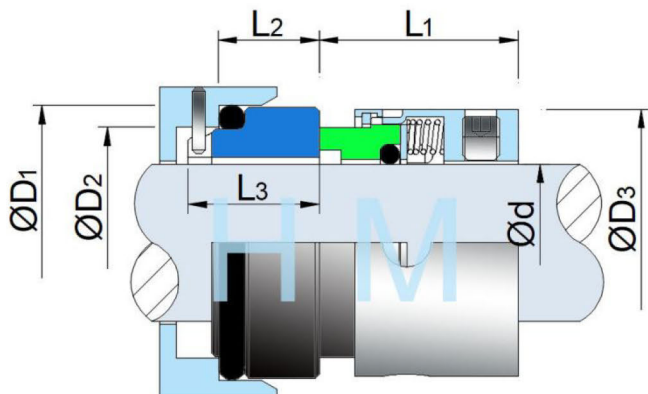

Type : Multi Spring Mechanical Seal
 Replacement: Vulcan 1659S , AES M03S , Crane 58U,
 Bergmann BT-C5 KU
 Temperature : -20℃ to +180℃
 Pressure : ≤2.5Mpa
 Speed : ≤15m/s
 Material: V1,Q1,Q2,U2,B,A,P,E,V,M1,M2,F,G,M

d (mm)	D3	D2	D1	L1	L2	L3
14	24	21	25	23.0	12.0	18.5
16	26	23	27	23.0	12.0	18.5
18	32	27	33	24.0	13.5	20.5
20	34	29	35	24.0	13.5	20.5
22	36	31	37	24.0	13.5	20.5
24	38	33	39	26.5	13.3	20.3
25	39	34	40	27.0	13.0	20.0
28	42	37	43	30.0	12.5	19.5
30	44	39	45	30.5	12.0	19.0
32	46	42	48	30.5	12.0	19.0
33	47	42	48	30.5	12.0	19.0
35	49	44	50	30.5	12.0	19.0
38	54	49	56	32.0	13.0	20.0
40	56	51	58	32.0	13.0	20.0
43	59	54	61	32.0	13.0	20.0
45	61	56	63	32.0	13.0	20.0
48	64	59	65	32.0	13.0	20.0
50	66	62	70	34.0	13.5	20.5
53	69	65	73	34.0	13.5	20.5
55	71	67	75	34.0	13.5	20.5
58	78	70	78	39.0	13.5	20.5
60	80	72	80	39.0	13.5	20.5
63	83	75	83	39.0	13.5	20.5
65	85	77	85	39.0	13.5	20.5
68	88	81	90	39.0	13.5	20.5
70	90	83	92	45.5	14.5	21.5
75	99	88	97	45.5	14.5	21.5
80	104	95	105	45.0	15.0	22.0
85	109	100	110	45.0	15.0	22.0
90	114	105	115	50.0	15.0	22.0
95	119	110	120	50.0	15.0	22.0
100	124	115	125	50.0	15.0	22.0