



HM59U

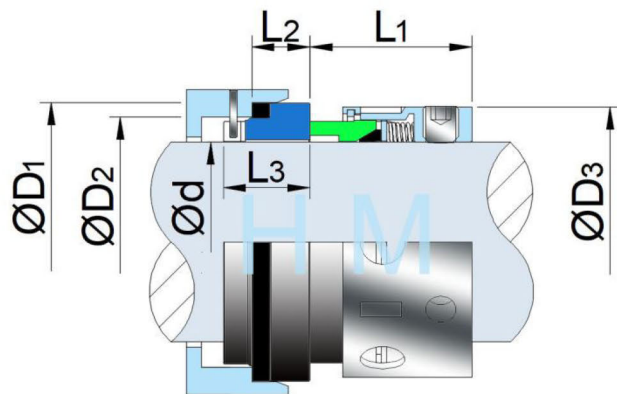

Type : Multi Spring Mechanical Seal
 Replacement: Vulcan 1659 , AES M03 , Crane 59U,
 Bergmann BT-C56 KU
 Temperature: -40°C to +250°C
 Pressure: $\leq 1.2\text{Mpa}$
 Speed: $\leq 15\text{m/s}$
 Material: V1,Q1,Q2,U2,B,A,P,E,V,M1,M2,F,G,M

d (mm)	D3	D2	D1	L1	L2	L3
14	24	21	25	23.0	12.0	18.5
16	26	23	27	23.0	12.0	18.5
18	32	27	33	24.0	13.5	20.5
20	34	29	35	24.0	13.5	20.5
22	36	31	37	24.0	13.5	20.5
24	38	33	39	26.5	13.3	20.3
25	39	34	40	27.0	13.0	20.0
28	42	37	43	30.0	12.5	19.5
30	44	39	45	30.5	12.0	19.0
32	46	42	48	30.5	12.0	19.0
33	47	42	48	30.5	12.0	19.0
35	49	44	50	30.5	12.0	19.0
38	54	49	56	32.0	13.0	20.0
40	56	51	58	32.0	13.0	20.0
43	59	54	61	32.0	13.0	20.0
45	61	56	63	32.0	13.0	20.0
48	64	59	65	32.0	13.0	20.0
50	66	62	70	34.0	13.5	20.5
53	69	65	73	34.0	13.5	20.5
55	71	67	75	34.0	13.5	20.5
58	78	70	78	39.0	13.5	20.5
60	80	72	80	39.0	13.5	20.5
63	83	75	83	39.0	13.5	20.5
65	85	77	85	39.0	13.5	20.5
68	88	81	90	39.0	13.5	20.5
70	90	83	92	45.5	14.5	21.5
75	99	88	97	45.5	14.5	21.5
80	104	95	105	45.0	15.0	22.0
85	109	100	110	45.0	15.0	22.0
90	114	105	115	50.0	15.0	22.0
95	119	110	120	50.0	15.0	22.0
100	124	115	125	50.0	15.0	22.0