


HM58B

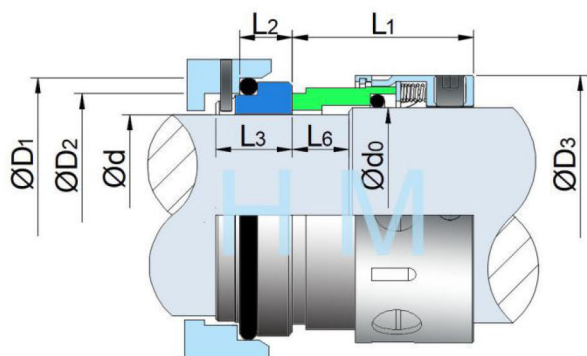

Type: Multi Spring Mechanical Seal
 Replacement: Vulcan 1659BS , AES M04S,
 Crane 58B , Bergmann BT-C5 KB
 Temperature : -40°C to +250°C
 Pressure: $\leq 2.5\text{Mpa}$
 Speed: $\leq 15\text{m/s}$
 Material: V1,Q1,Q2,U2,B,A,P,E,V,M1,M2,F,G,M

Size (mm)	d	d0	D3	D2	D1	L1	L2	L3	L6
14	14	18	32	21	25	30.5	12.0	18.5	6.0
16	16	20	34	23	27	30.5	12.0	18.5	6.0
18	18	22	36	27	33	31.5	13.5	20.5	6.5
20	20	24	38	29	35	31.5	13.5	20.5	6.5
22	22	26	40	31	37	31.5	13.5	20.5	6.5
24	24	28	42	33	39	34.2	13.3	20.3	6.7
25	25	30	44	34	40	34.5	13.0	20.0	7.0
28	28	33	47	37	43	37.5	12.5	19.5	7.5
30	30	35	49	39	45	38.0	12.0	19.0	8.0
32	32	38	54	42	48	38.0	12.0	19.0	8.0
33	33	38	54	42	48	38.0	12.0	19.0	8.0
35	35	40	56	44	50	38.0	12.0	19.0	8.0
38	38	43	59	49	56	39.5	13.0	20.0	10.0
40	40	45	61	51	58	39.5	13.0	20.0	10.0
43	43	48	64	54	61	39.5	13.0	20.0	10.0
45	45	50	66	56	63	39.5	13.0	20.0	10.0
48	48	53	69	59	66	39.5	13.0	20.0	10.0
50	50	55	71	62	70	44.0	13.5	20.5	11.5
53	53	58	78	65	73	44.0	13.5	20.5	11.5
55	55	60	80	67	75	44.0	13.5	20.5	11.5
58	58	63	83	70	78	49.0	13.5	20.5	11.5
60	60	65	85	72	80	49.0	13.5	20.5	11.5
63	63	68	88	75	83	49.0	13.5	20.5	11.5
65	65	70	90	77	85	49.0	13.5	20.5	11.5
70	70	75	95	83	92	55.5	14.5	21.5	13.5
75	75	80	104	88	97	55.5	14.5	21.5	13.5
80	80	85	109	95	105	55.5	15.0	22.0	13.0
85	85	90	114	100	110	60.0	15.0	22.0	13.0
90	90	95	119	105	115	60.0	15.0	22.0	13.0
95	95	100	124	110	120	60.0	15.0	22.0	13.0
100	100	105	129	115	125	60.0	15.0	22.0	13.0