


HMCS-A58(CDP)



Type: Double Cartridge Seal
 Replacement: AES CDP
 Temperature: -30°C to +205°C
 Pressure: $\leq 2.1\text{Mpa}$
 Speed: $\leq 25\text{m/s}$
 Material: B,A,Q1,Q2,U2,E,V,K,F,G,M

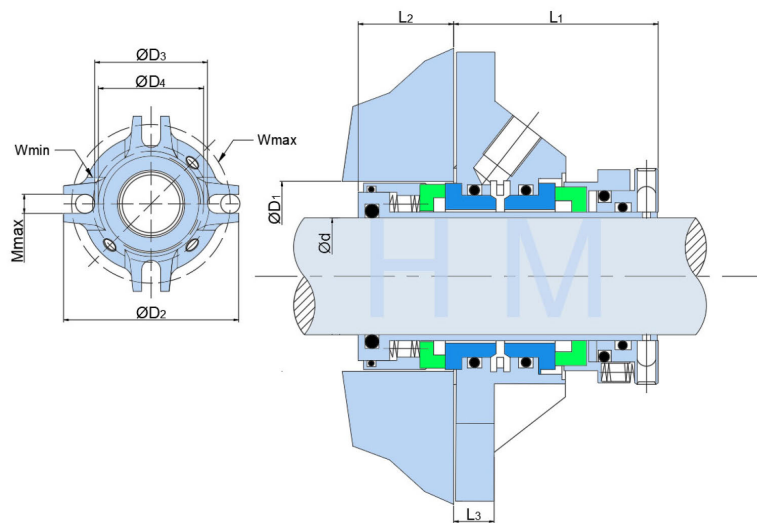

hengmi@mesel.com

d (mm)	D1			D2	D3	D4	W		M max	L1	L2	L3
	min	mint	max				min	max				
90	114.3	115.8	127.0	215.9	150.8	127.0	171.5	195.2	20	60.3	31.8	19.6
95	117.5	119.0	130.2	215.9	150.8	127.0	171.5	195.2	20	60.3	31.8	19.6
100	123.9	125.0	139.7	228.6	168.3	136.5	188.9	207.9	20	60.3	31.8	19.6
115	142.9	144.4	168.3	254.0	186.6	155.6	211.1	230.2	22	60.3	31.8	19.6
120	142.9	144.4	168.3	254.0	186.6	155.6	211.1	230.2	22	60.3	31.8	19.6

d (inch)	D1			D2	D3	D4	W		M max	L1	L2	L3
	min	mint	max				min	max				
3.625	4.500	4.560	5.000	8.5	5.937	5.000	6.750	7.687	3/4	2.375	1.25	0.769
3.750	4.625	4.685	5.125	8.5	5.937	5.000	6.750	7.687	3/4	2.375	1.25	0.769
3.875	4.750	4.810	5.250	8.5	5.937	5.000	6.750	7.687	3/4	2.375	1.25	0.769
4.000	4.875	4.935	5.500	9.0	6.625	5.375	7.437	8.187	3/4	2.375	1.25	0.769
4.625	5.625	5.685	6.625	10.0	7.345	6.125	8.312	9.062	3/4	2.375	1.25	0.769
4.750	5.625	5.685	6.625	10.0	7.345	6.125	8.312	9.062	3/4	2.375	1.25	0.769