



# HMCS-AP04(D2PR)



Type: Double Cartridge Seal  
 Replacement: APEX D2 PR  
 Temperature: -40 to +260°C  
 Pressure :  $\leq 25$  Bar  
 Speed:  $\leq 10$  m/s  
 Material : Q1,Q2,U2,T,V,M1,F,G,M

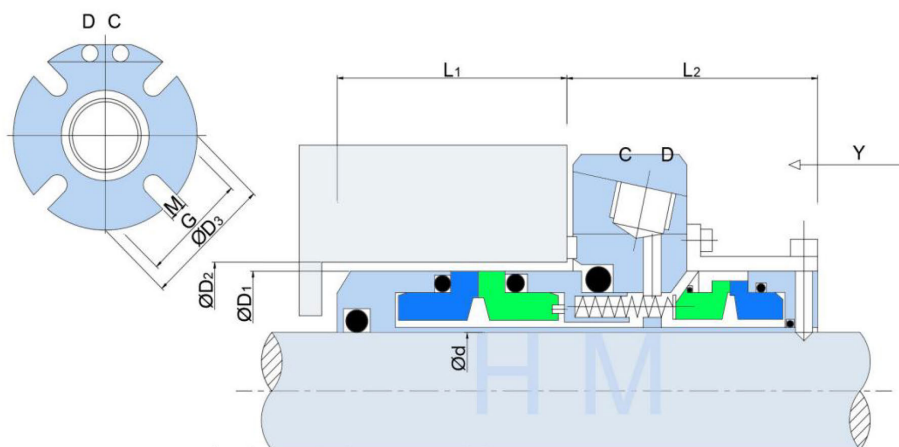

[hengmi@meseal.com](mailto:hengmi@meseal.com)

| d<br>(inch) | D1    | D2    | D3    | G     | L1    | L2    | M     |
|-------------|-------|-------|-------|-------|-------|-------|-------|
| 1.000       | 1.594 | 1.625 | 4.000 | 2.224 | 1.129 | 2.047 | 0.551 |
| 1.125       | 1.708 | 1.750 | 4.125 | 2.421 | 1.129 | 2.047 | 0.551 |
| 1.250       | 1.865 | 2.000 | 4.250 | 2.500 | 1.129 | 2.047 | 0.551 |
| 1.375       | 1.950 | 2.000 | 4.250 | 2.696 | 1.129 | 2.047 | 0.551 |
| 1.500       | 2.172 | 2.250 | 5.000 | 2.815 | 1.129 | 2.047 | 0.551 |
| 1.625       | 2.283 | 2.375 | 4.500 | 2.972 | 1.129 | 2.047 | 0.551 |
| 1.750       | 2.401 | 2.500 | 5.000 | 3.062 | 1.129 | 2.047 | 0.551 |
| 1.875       | 2.537 | 2.625 | 5.250 | 3.189 | 1.129 | 2.047 | 0.551 |
| 2.000       | 2.670 | 2.750 | 5.500 | 3.307 | 1.129 | 2.188 | 0.551 |
| 2.125       | 2.795 | 2.875 | 5.750 | 3.503 | 1.129 | 2.188 | 0.709 |
| 2.250       | 2.913 | 3.000 | 6.500 | 3.622 | 1.129 | 2.188 | 0.709 |
| 2.375       | 3.037 | 3.125 | 6.500 | 3.818 | 1.129 | 2.188 | 0.709 |
| 2.500       | 3.288 | 3.375 | 7.000 | 3.976 | 1.488 | 2.720 | 0.709 |
| 2.625       | 3.410 | 3.500 | 7.000 | 4.055 | 1.488 | 2.720 | 0.709 |
| 2.750       | 3.617 | 3.625 | 7.000 | 4.370 | 1.488 | 2.720 | 0.709 |
| 3.000       | 3.795 | 4.000 | 7.480 | 5.079 | 1.488 | 2.720 | 0.709 |