


HMCS-B02(HR)

Type: Single Cartridge Seal
Replacement: Burgmann HR
Temperature: -20°C to +180°C
Pressure : $\leq 1.6\text{Mpa}$
Speed: $\leq 10\text{m/s}$
Material : Q1,Q2,U2,T,V,M1,F,G,M

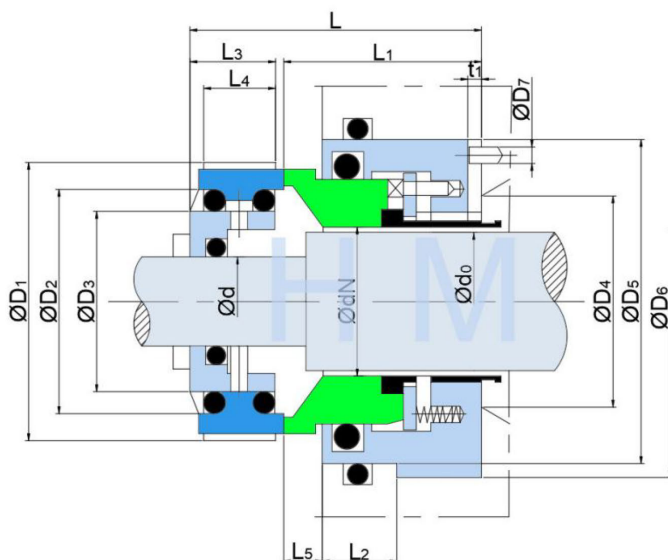

hengmi@meseal.com

d (mm)	d0	dN	D1	D2	D3	D4	D5	D6 +0.2	D7	L	L1	L2	L3	L4	L5	t1
20	28	36	64	47.1	38	70	75	40	4	75	53	20	19.5	17	10.5	3
25	33	41	69	52.1	43	75	80	45	4	75	53	20	19.5	17	10.5	3
28	38	46	74	57.1	48	80	85	50	4	75	53	20	19.5	17	10.5	3
33	43	51	79	62.1	53	85	90	55	4	75	53	20	19.5	17	10.5	3
38	48	56	84	67.1	58	90	95	60	4	75	53	20	19.5	17	10.5	3
43	53	61	89	72.1	63	95	100	65	4	75	53	20	19.5	17	10.5	3
48	58	66	94	77.1	68	100	105	70	4	75	53	20	19.5	17	10.5	3
53	63	71	100	82.1	73	105	110	75	4	75	53	20	19.5	17	10.5	3
55	65	75	105	87.1	78	110	115	79	4	75	53	20	19.5	17	10.5	3
60	70	80	110	92.1	83	115	120	84	4	75	53	20	19.5	17	10.5	3
65	75	85	115	97.1	88	120	125	89	4	75	53	20	19.5	17	10.5	3
70	80	90	120	102.1	93	125	130	94	4	75	53	20	19.5	17	10.5	3
75	85	95	125	107.1	98	130	135	99	5	75	53	20	19.5	17	10.5	3
80	90	100	130	112.1	103	135	140	104	5	75	53	20	19.5	17	10.5	3
90	100	110	146	126.1	117	155	163	116	5	98	73	30	22.0	19	16.0	4
100	110	120	156	136.1	127	165	173	126	5	98	73	30	22.0	19	16.0	4
110	120	130	166	145.1	136	175	183	136	5	98	73	30	22.0	19	16.0	4
120	130	140	176	154.1	145	185	193	146	5	98	73	30	22.0	19	16.0	4
130	140	150	187	163.9	155	195	203	156	5	98	73	30	22.0	19	16.0	4
140	150	160	188	174.9	166	205	213	166	5	98	73	30	22.0	19	16.0	4
160	170	180	219	193.9	185	230	238	186	5	98	73	30	22.0	19	16.0	4
180	190	200	239	213.9	205	255	265	206	5	98	73	30	22.0	19	16.0	4