

HMCS-B13(TSK1)

Type : Single Cartridge Seal


Replacement: Burgmann TSK1

Temperature: -40°C to +220°C

Pressure: ≤ 2.5 Mpa

Speed: ≤ 16 m/s

Material : Q1,Q2,U2,T,V,M1,F,G,M

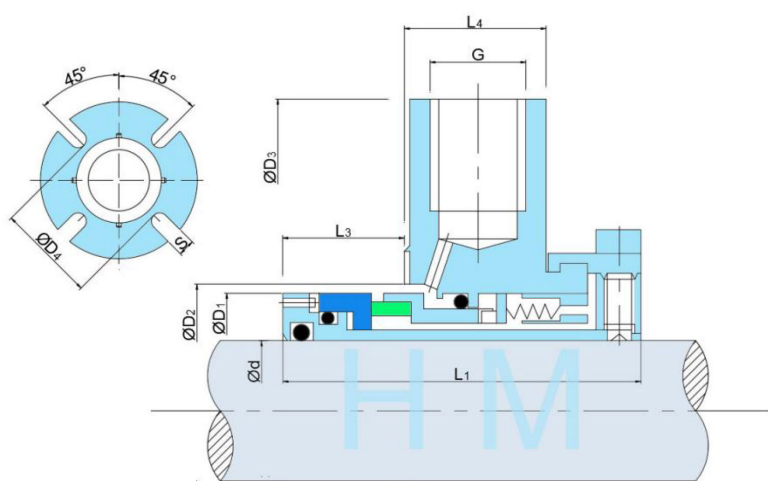

hengmi@mesel.com

d (mm)	D1	D2		D3	L1	L3	L4	D4	S	G (Inche)
		min	max							
25	43.0	44.0	51.0	105	67	24.6	25.4	62	14	1/4"
28	46.0	47.0	52.0	105	67	24.6	25.4	62	14	1/4"
30	48.0	49.0	56.0	105	67	24.6	25.4	65	14	1/4"
33	50.0	51.0	57.0	110	67	24.6	25.4	67	14	1/4"
35	53.0	54.0	61.0	113	67	24.6	25.4	70	14	1/4"
38	56.0	57.0	66.0	123	67	24.6	25.4	75	14	3/8n
40	58.0	59.0	68.0	123	67	24.6	25.4	75	16	3/8"
43	60.0	61.5	70.5	133	67	24.6	25.4	80	16	3/8"
45	62.5	64.0	73.0	138	67	24.6	25.4	81	16	3/8"
48	65.5	67.0	75.0	138	67	24.6	25.4	84	16	3/8"
50	68.0	69.0	78.0	148	67	24.6	25.4	87	16	3/8"
55	73.0	74.0	83.0	148	67	24.6	25.4	90	18	3/8"
60	78.0	79.0	91.0	157	67	24.6	25.4	102	18	3/8n
65	83.0	84.5	98.5	163	67	24.6	25.4	109	18	3/8"
70	93.0	95.0	108.0	178	67	24.6	25.4	118	18	3/8"
75	100.0	101.6	118.0	190	84	26.6	28.0	129	18	3/8"
80	106.4	108.0	124.0	195	84	26.6	28.0	135	18	3/8"
85	109.5	111.1	128.0	198	84	26.6	28.0	139	22	3/8n
90	115.9	117.5	135.0	205	84	26.6	28.0	145	22	3/8n
95	119.1	120.7	138.0	208	84	26.6	28.0	148	22	3/8n
100	125.4	127.0	144.0	218	84	26.6	28.0	154	22	3/8"