


HMCS-B17(4600)



hengmi@meseal.com

Type: Single Cartridge Seal
Replacement: Burgmann 4600
Temperature: -20 to +180°C
Pressure: ≤1.8Mpa
Speed: ≤2m/s
Material: Q1,Q2,U2,T,V,M1,F,G,M

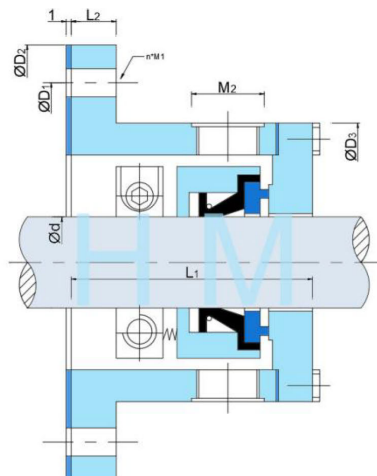

d (mm)	D1	D2	D3	L1	L2	M1	M2	n
50	142	165	125	110	15	M10	G1/2"	4
60	152	175	135	110	15	M10	G1/2"	4
70	185	215	145	110	15	M16	G1/2"	4
80	195	225	155	115	15	M16	G1/2"	4
90	205	235	165	115	15	M16	G1/2"	4
100	215	245	175	115	15	M16	G1/2"	4
110	230	260	192	120	15	M16	G1/2"	6
120	240	270	202	120	15	M16	G1/2"	6
130	250	280	212	120	15	M16	G1/2"	6
140	260	290	222	120	15	M16	G1/2"	6
150	270	300	232	120	15	M16	G1/2"	6
160	280	310	242	120	15	M16	G1/2"	6
170	290	320	252	120	15	M16	G1/2"	6
180	300	330	262	130	15	M16	G1/2"	6
190	310	340	272	130	15	M16	G1/2"	8
200	320	350	282	130	15	M16	G1/2"	8
210	330	360	292	130	15	M16	G1/2"	8
220	340	370	302	130	15	M16	G1/2"	8
230	350	380	312	130	15	M16	G1/2"	8
240	365	405	340	140	20	M20	G1/2"	8
250	375	415	350	140	20	M20	G1/2"	8
260	385	425	360	140	20	M20	G3/4"	8
270	395	435	370	140	20	M20	G3/4"	8
280	405	445	380	140	20	M20	G3/4"	8
290	415	455	390	140	20	M20	G3/4"	8
300	425	465	400	140	20	M20	G3/4"	8
310	445	485	420	140	20	M20	G3/4"	8
320	455	495	430	140	20	M20	G3/4"	8