


HMCS-B14(TSK1D)

Type: Double Cartridge Seal
 Replacement: Burgmann TSK1 D
 Temperature: -30°C to +200°C
 Pressure: $p_1=1.0\text{Mpa}, p_3=1.3\text{Mpa}$
 Speed: $\leq 16\text{m/s}$
 Material: Q1, Q2, A, B, U1, U2, P, E, V, T, F, G, T2, M5

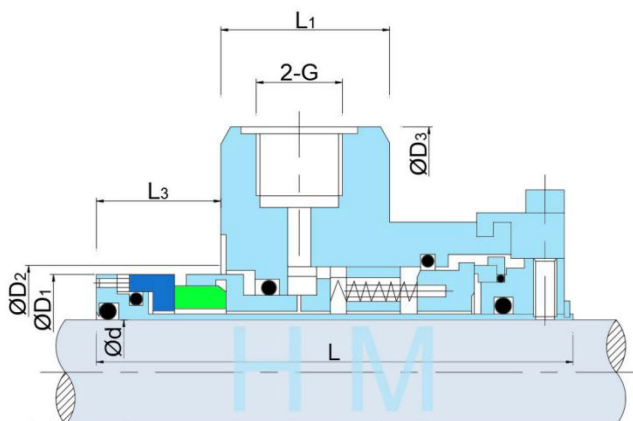

hengmi@meseal.com

d (mm)	D1	D2		D3	D5	L	L1	L3	S	G (Inch)
		min	max							
25	43.0	51.0	44.0	105	62	86.5	25.4	24	14	1/4"
28	46.0	52.0	47.0	105	62	86.5	25.4	24	14	1/4"
30	48.0	56.0	49.0	105	65	86.5	25.4	24	14	1/4"
33	50.0	57.0	51.0	110	67	86.5	25.4	24	14	1/4"
35	53.0	61.0	54.0	113	70	86.5	25.4	24	14	1/4"
38	56.0	66.0	57.0	123	75	86.5	25.4	24	14	3/8"
40	58.0	68.0	59.0	123	78	86.5	25.4	24	16	3/8"
43	60.0	70.5	61.5	133	80	86.5	25.4	24	16	3/8"
45	62.5	73.0	64.0	138	81	86.5	25.4	24	16	3/8"
48	65.5	75.0	67.0	138	84	86.5	25.4	24	16	3/8"
50	68.0	78.0	69.0	148	87	86.5	25.4	24	16	3/8"
55	73.0	83.0	74.0	148	90	86.5	25.4	24	18	3/8"
60	78.0	91.0	79.0	157	102	86.5	25.4	24	18	3/8"
65	83.0	98.5	84.5	163	109	86.5	25.4	24	18	3/8"
70	93.0	108.0	95.0	178	118	86.5	25.4	24	18	3/8"
75	100.0	118.0	101.6	190	129	108.0	28.0	30	18	3/8"
80	106.4	124.0	108.0	195	135	108.0	28.0	30	18	3/8"
85	109.5	128.0	111.1	198	139	108.0	28.0	30	22	3/8"
90	115.9	135.0	117.5	205	145	108.0	28.0	30	22	3/8"
95	119.1	138.0	120.7	208	148	108.0	28.0	30	22	3/8"
100	125.4	144.0	127.0	218	154	108.0	28.0	30	22	3/8"