
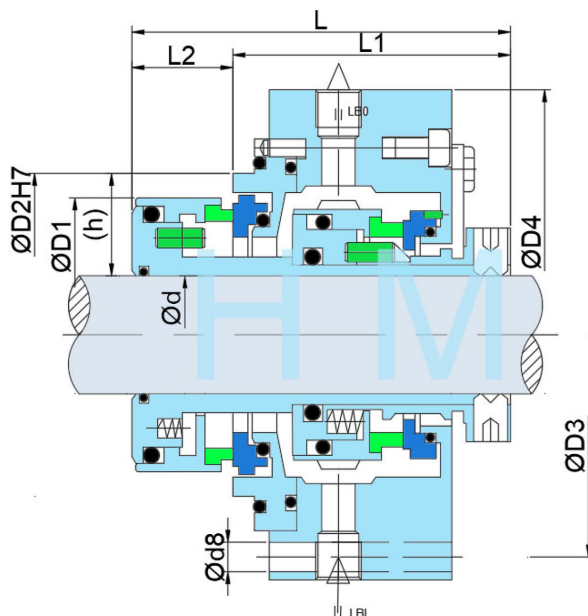


HMCS-B16(APItex-T)

Type: Double Cartridge Seal
 Replacement: Burgmann Apitex-T
 Temperature: -40 to +220°C
 Pressure : $\leq 4\text{Mpa}$
 Speed: $\leq 20\text{m/s}$
 Material : Q1,S,A,Q2,V,E,P,M5,M6,G1,T4,M



hengmi@mesel.com

d (mm)	D1	D2	D3	D4	L	L1	L2	d8	Anz.	h (min.)
20	50.4	58	105	127	96.5	68.5	28.0	13.5	4	19.05
25	55.4	63	110	132	96.5	68.5	28.0	13.5	4	19.05
30	60.4	68	115	137	96.5	68.5	28.0	13.5	4	19.05
35	65.4	73	120	142	96.5	68.5	28.0	13.5	4	19.05
40	70.4	78	125	147	96.5	68.5	28.0	13.5	4	19.05
45	75.4	83	135	162	96.5	68.5	28.0	17.5	4	19.05
50	80.4	88	140	167	100.0	72.0	28.0	17.5	4	19.05
55	85.4	93	145	172	100.0	72.0	28.0	17.5	4	19.05
60	96.0	105	160	187	127.5	88.0	39.5	17.5	4	22.22
65	101.0	110	165	192	127.5	88.0	39.5	17.5	4	22.22
70	106.0	115	170	197	127.5	88.0	39.5	17.5	4	22.22
75	111.0	120	175	202	127.5	88.0	39.5	17.5	4	22.22
80	116.0	125	185	213	127.5	88.0	39.5	22.0	4	22.22
85	123.5	136	190	223	131.5	92.0	39.5	22.0	4	25.40
90	128.5	141	195	228	131.5	92.0	39.5	22.0	4	25.40
95	133.5	146	200	233	131.5	92.0	39.5	22.0	4	25.40
100	138.5	151	205	238	131.5	92.0	39.5	22.0	4	25.40
105	143.5	156	210	243	131.5	92.0	39.5	22.0	4	25.40
110	152.5	161	215	248	131.5	92.0	39.5	22.0	4	25.40