

HMCS-B15(APItex-S)

Type: Single Cartridge Seal


Replacement: Burgmann Apitex- S

Temperature: -40 to +220°C

Pressure : $\leq 4\text{Mpa}$

Speed: $\leq 22\text{m/s}$

Material : Q1,Q2,U2,T,V,M1,F,G,M

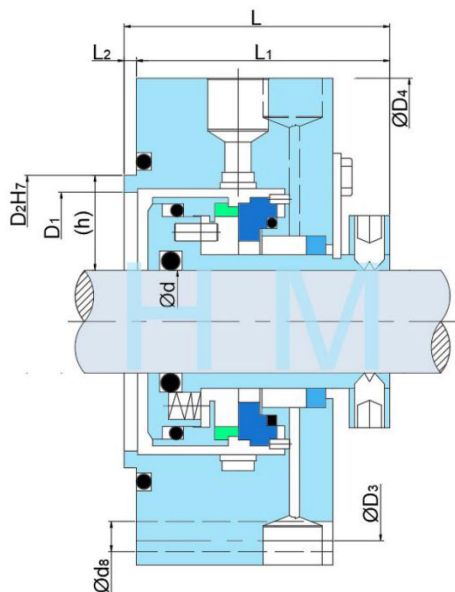

hengmi@meseal.com

d (mm)	D1	D2	D3	D4	d8	L	L1	L2	Anz.	h (min)
20	50.4	58	105	127	13.5	70.5	66.5	4	4	19.05
25	55.4	63	110	132	13.5	70.5	66.5	4	4	19.05
30	60.4	68	115	137	13.5	70.5	66.5	4	4	19.05
35	65.4	73	120	142	13.5	70.5	66.5	4	4	19.05
40	70.4	78	125	147	13.5	70.5	66.5	4	4	19.05
45	75.4	83	135	162	17.5	70.5	66.5	4	4	19.05
50	80.4	88	140	167	17.5	72.5	68.5	4	4	19.05
55	85.4	93	145	172	17.5	72.5	68.5	4	4	19.05
60	96.0	105	160	187	17.5	87.0	83.0	4	4	22.22
65	101.0	110	165	192	17.5	87.0	83.0	4	4	22.22
70	106.0	115	170	197	17.5	87.0	83.0	4	4	22.22
75	111.0	120	175	202	17.5	87.0	83.0	4	4	22.22
80	116.0	125	185	218	22.0	87.0	83.0	4	4	22.22
85	123.5	136	190	223	22.0	86.0	71.5	14.5*	4	25.40
90	128.5	141	195	228	22.0	86.0	71.5	14.5*	4	25.40
95	133.5	146	200	233	22.0	86.0	71.5	14.5*	4	25.40
100	138.5	151	205	238	22.0	86.0	71.5	14.5*	4	25.40
105	143.5	156	210	243	22.0	86.0	71.5	14.5*	4	25.40
110	152.5	161	215	248	22.0	86.0	71.5	14.5*	4	25.40