


HMCS-B11(XARTEX-ANSI-D)




Type: Double Cartridge Seal
 Replacement: Burgmann CARTEX ANSI- D
 Temperature: -20°C to +250°C
 Pressure : $\leq 2.5\text{Mpa}$
 Speed: $\leq 35\text{m/s}$
 Material : Q1,Q2,U2,T,V,M1,F,G,M

HMCS-B11(CARTEX ANSI-D)-A (use mechned cover)

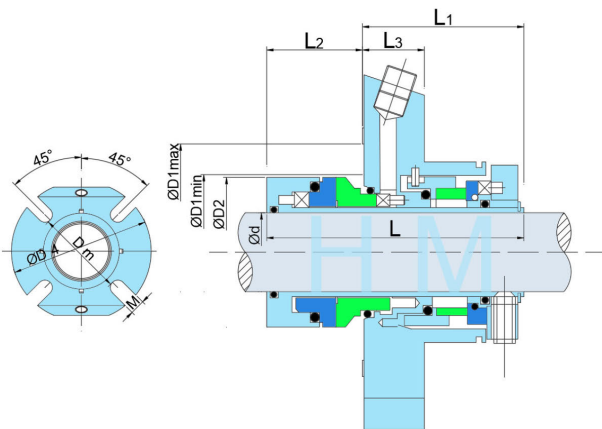

HMCS-B11(CARTEX ANSI-D)-B (use cast cover)

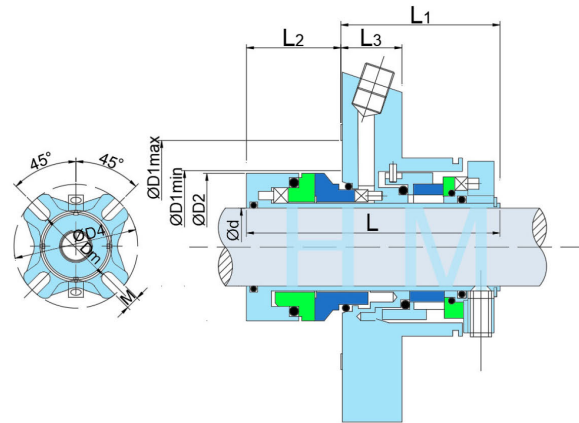

d (inch)	D2	D1min	D1max	L	L1	L2	L3	Dm	D4	M	Connection
1.000	1.693	1.732	2.205	3.406	2.102	1.303	1.000	2.441	3.937	0.0433	1/4NPT
1.125	1.713	1.752	2.205	3.228	3.228	1.343	1.000	2.441	4.134	0.437	1/4NPT
1.250	1.969	2.008	2.402	3.406	2.102	1.303	1.000	2.756	4.252	0.433	1/4NPT
1.375	1.961	2.000	2.402	3.406	2.083	1.303	1.000	2.756	4.213	0.437	1/4NPT
1.500	2.200	2.244	2.717	3.406	2.102	1.303	1.000	2.953	4.488	0.551	3/8NPT
1.625	2.340	2.421	2.795	3.406	2.102	1.303	1.000	3.091	4.921	0.551	3/8NPT
1.750	2.461	2.500	2.953	3.406	2.102	1.303	1.000	3.228	5.118	0.559	3/8NPT
1.875	2.583	2.661	3.070	3.406	2.102	1.303	1.000	3.307	5.118	0.551	3/8NPT
2.000	2.677	2.756	3.189	3.406	2.102	1.303	1.000	3.425	5.472	0.630	3/8NPT
2.125	2.834	2.913	3.583	3.406	2.102	1.303	1.000	3.819	5.512	0.650	3/8NPT
2.250	2.960	3.039	3.583	3.406	2.102	1.303	1.000	3.858	5.866	0.650	3/8NPT
2.375	3.070	3.125	3.590	*	*	*	1.000	*	6.181	0.709	3/8NPT
2.500	3.212	3.291	3.937	3.406	2.102	1.303	1.122	4.528	6.693	0.709	3/8NPT
2.625	3.338	3.417	4.016	3.406	2.102	1.303	1.250	4.528	6.378	0.630	3/8NPT
2.750	3.660	3.740	4.370	3.406	2.102	1.303	1.260	4.646	7.441	0.709	3/8NPT
3.000	3.937	4.016	4.724	4.252	2.516	1.736	1.260	5.000	7.835	0.709	3/8NPT
3.250	4.189	4.288	4.921	4.252	2.516	1.736	1.260	5.315	7.830	0.709	3/8NPT
3.750	4.689	4.750	5.433	*	*	*	1.000	*	8.189	0.866	3/8NPT