



HMCS-B10(CARTEX-ANSI-S)

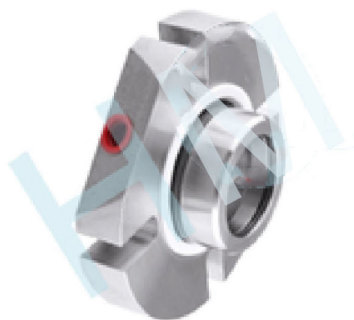


Type: Single Cartridge Seal
 Replacement: Burgmann CARTEX ANSI-S
 Temperature: -20°C to +250°C
 Pressure: $\leq 2.5\text{Mpa}$
 Speed: $\leq 35\text{m/s}$
 Material: Q1,Q2,U2,T,V,M1,F,G,M

HMCS-B10(CARTEX ANSI-S)-A (Use mechined cover)

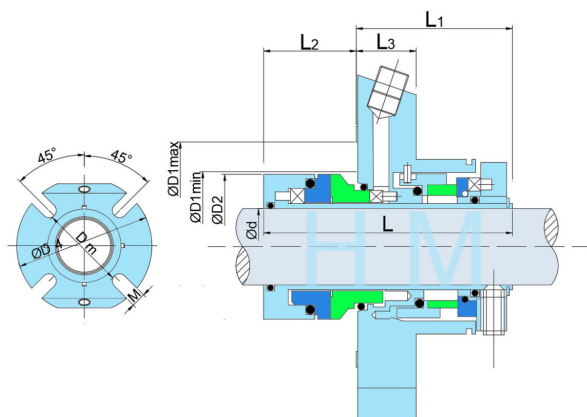

HMCS-B10(CARTEX ANSI-S)-B (use cast cover)

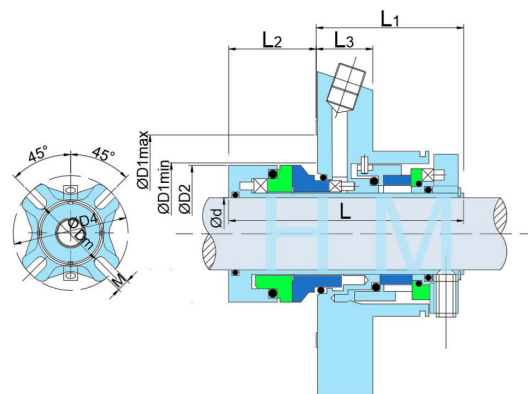

d (inch)	D1 min	D1 max	D2	D4	Dm	L	L1	L2	L3	M	Connection
1.000	1.732	2.205	1.693	3.937	2.756	2.638	1.669	0.969	1.000	0.433	1/4 NPT
1.125	1.752	2.205	1.713	4.134	2.440	2.638	1.669	0.969	1.000	0.437	1/4 NPT
1.250	2.008	2.402	1.969	4.252	2.638	2.638	1.669	0.969	1.000	0.433	1/4 NPT
1.375	2.000	2.402	1.961	4.213	2.760	2.638	1.669	0.969	1.000	0.437	1/4 NPT
1.500	2.244	2.717	2.200	4.488	2.950	2.638	1.669	0.969	1.000	0.551	3/8 NPT
1.625	2.421	2.795	2.340	4.921	3.030	2.638	1.669	0.969	1.000	0.551	3/8 NPT
1.750	2.500	2.953	2.461	5.118	3.228	2.638	1.669	0.969	1.000	0.559	3/8 NPT
1.875	2.661	3.070	2.583	5.118	3.190	2.638	1.669	0.969	1.000	0.551	3/8 NPT
2.000	2.756	3.189	2.677	5.472	3.430	2.638	1.669	0.969	1.000	0.63	3/8 NPT
2.125	2.913	3.583	2.834	5.512	3.820	2.638	1.669	0.969	1.000	0.65	3/8 NPT
2.250	3.039	3.583	2.960	5.866	3.858	2.638	1.669	0.969	1.000	0.65	3/8 NPT
2.375	3.125	3.590	3.070	6.181	4.020	2.638	1.669	0.969	1.000	0.709	3/8 NPT
2.500	3.291	3.937	3.212	6.693	4.528	2.638	1.669	0.969	1.122	0.709	3/8 NPT
2.625	3.471	4.016	3.338	6.378	4.528	2.638	1.669	0.969	1.250	0.63	3/8 NPT
2.750	3.740	4.370	3.660	7.441	4.646	2.638	1.929	0.709	1.260	0.709	3/8 NPT
3.000	4.016	4.724	3.937	7.835	5.000	3.307	2.260	1.047	1.260	0.709	3/8 NPT
3.250	4.268	4.921	4.189	7.830	5.315	3.307	2.260	1.047	1.260	0.709	3/8 NPT
3.750	4.750	5.433	4.689	8.189	5.827	3.307	2.260	1.047	1.000	0.866	3/8 NPT