
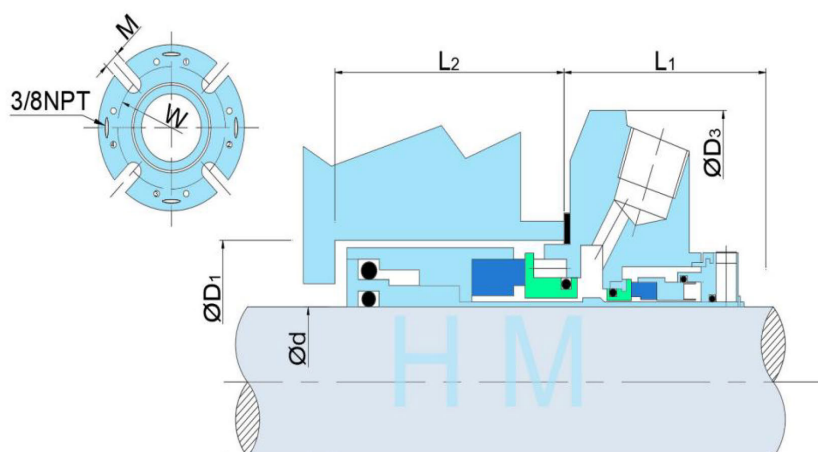


HMCS-J22(4620P)

Type: Double Cartridge Seal
 Replacement: Crane 4620P
 Temperature: -30°C to +205°C
 Pressure: $\leq 2.1\text{Mpa}$
 Speed: $\leq 25\text{m/s}$
 Material : Q1,Q2,U2,T,V,M1,F,G,M



hengmi@meseal.com

d (mm)	D1		D3	L1	L2 (min	W		M
	Min	Max				Min	Max	
24	41.0	48.0	101.6	50.8	41.5	71	83	13.3
25	41.0	48.0	101.6	50.8	41.5	71	83	13.3
28	44.0	51.2	104.8	54.0	40.7	74	86	13.3
30	46.0	58.3	108.0	54.0	40.7	82	89	13.3
32	47.6	58.3	108.0	54.0	40.7	82	89	13.3
33	50.8	61.5	111.1	54.0	40.7	85	92	13.3
35	50.8	61.5	111.1	54.0	40.7	85	92	13.3
38	57.2	68.1	123.8	55.5	42.7	91	105	13.3
40	60.0	71.4	127.0	55.5	42.7	96	108	14.3
43	63.5	74.1	133.4	55.5	42.7	98	114	14.3
45	63.5	74.1	133.4	55.5	42.7	98	114	14.3
48	66.7	74.1	133.4	55.5	42.7	98	114	14.3
50	69.9	76.6	139.7	60.3	43.5	102	121	14.3
53	73.0	85.3	148.8	60.3	43.5	114	125	17.5
55	73.0	85.3	148.8	60.3	43.5	114	125	17.5
58	79.4	91.7	165.1	64.2	43.5	120	141	17.5
60	79.4	91.7	165.1	64.2	43.5	120	141	17.5
63	85.7	98.8	171.5	66.7	43.3	127	147	17.5
65	85.7	98.8	171.5	66.7	43.3	127	147	17.5
70	93.6	103.2	171.5	65.1	43.9	131	147	17.5