


HMCS-J21(4610)

Type: Single Cartridge Seal
Replacement: Crane 4610
Temperature: -30°C to $+205^{\circ}\text{C}$
Pressure: $\leq 2.8\text{Mpa}$
Speed: $\leq 25\text{m/s}$
Material: Q1,Q2,U2,T,V,M1,F,G,M

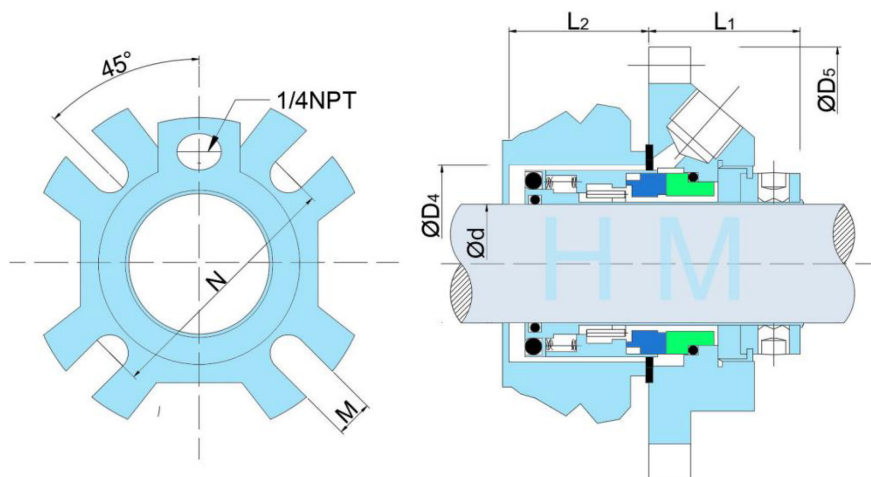

hengmi@mesal.com

d (mm)	D4		D5	L2 Min	L1	N		M
	Min	Max				Min	Max	
24	40.00	49.2	104.8	30	34.5	66.7	95.3	11.1
25	41.00	49.2	104.8	30	34.5	66.7	95.3	11.1
28	44.00	52.4	108.0	30	34.5	69.9	98.4	11.1
30	46.00	55.6	111.0	30	34.5	73.0	101.6	11.1
32	47.60	55.6	111.0	30	34.5	73.0	101.6	11.1
33	49.00	58.7	114.3	30	34.5	73.0	101.6	11.1
35	50.80	58.7	114.3	30	34.5	77.8	104.8	11.1
38	57.15	63.5	127.0	31	35.5	87.3	114.3	14.3
40	60.00	63.5	127.0	31	35.5	87.3	114.3	14.3
43	63.00	66.7	133.4	31	35.5	90.5	120.7	14.3
45	63.50	66.7	133.4	31	35.5	90.5	120.7	14.3
48	66.70	76.2	139.7	31	35.5	98.4	127.0	14.3
50	69.80	76.2	139.7	31	35.5	98.4	127.0	14.3
53	73.00	84.1	146.0	31	35.5	111.1	130.2	17.5
55	73.00	84.1	146.0	31	35.5	111.1	130.2	17.5
58	79.40	90.5	152.4	31	35.5	117.5	136.5	17.5
60	79.40	90.5	152.4	31	35.5	117.5	136.5	17.5
63	82.60	98.4	158.8	34	35.5	123.8	142.9	17.5
65	88.90	98.4	158.8	34	36.0	123.8	142.9	17.5
70	95.00	98.4	158.8	34	36.0	123.8	142.9	17.5