
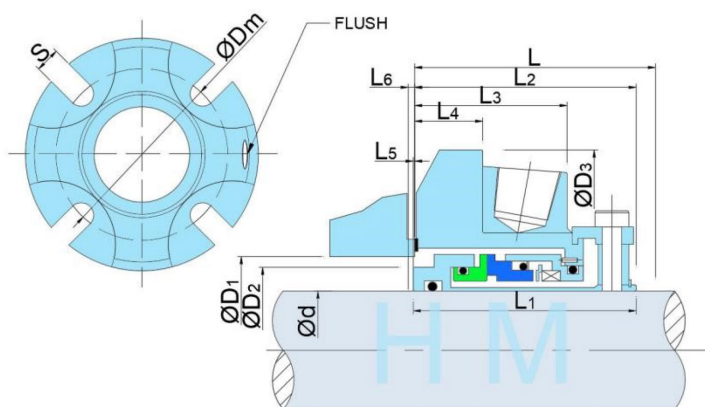


HMCS-J23(5610)

Type: Single Cartridge Seal
Replacement: Crane 5610
Temperature: -50°C to +204°C
Pressure: $\leq 2.0\text{Mpa}$
Speed: $\leq 23\text{m/s}$
Material: B,A,Q1,Q2,T,V,K,F,G,M



hengmi@mesel.com

d (mm)	D1		D2	D3	L	L1	L2	L3	L4	L5	L6	Dm	S
	Min	max											
24	36.7	48.0	34.9	101.6	50.8	50.5	49.6	34.4	13.5	0.9	4.0	71.2	13.3
25	36.7	48.0	34.9	101.6	50.8	50.5	49.6	34.4	13.5	0.9	4.0	71.2	13.3
28	*	51.2	38.1	104.8	54.0	52.4	52.4	36.7	13.5	*	3.2	74.6	13.3
30	*	56.5	40.0	108.0	54.0	52.4	52.4	36.7	13.5	*	3.2	79.9	13.3
32	*	58.3	41.3	108.0	54.0	52.4	52.4	36.7	13.5	*	3.2	81.6	13.3
33	*	61.5	44.5	111.1	54.0	52.4	52.4	36.7	13.5	*	3.2	84.8	13.3
35	*	61.5	44.5	111.1	54.0	52.4	52.4	36.7	13.5	*	3.2	84.8	13.3
38	51.0	68.1	49.2	123.8	55.5	54.8	54.0	37.8	15.1	0.8	4.0	91.4	13.3
40	54.2	71.4	52.4	127.0	55.5	54.8	54.0	37.8	15.1	0.8	4.0	96.7	14.3
43	56.9	74.1	55.1	133.4	55.5	54.8	54.0	37.8	15.1	0.8	4.0	98.4	14.3
45	56.9	74.1	55.1	133.4	55.5	54.8	54.0	37.8	15.1	0.8	4.0	98.4	14.3
48	60.5	74.1	58.7	133.4	55.5	54.8	54.0	37.8	15.1	0.8	4.0	98.4	14.3
50	63.7	76.6	61.9	139.7	60.3	60.3	58.7	40.7	27.0	1.6	4.7	101.6	14.3
53	66.9	85.3	65.1	148.8	60.3	60.3	58.7	40.7	15.1	1.6	4.7	113.5	17.4
55	75.0	85.3	66.7	148.8	60.3	60.3	58.7	40.7	15.1	1.6	4.7	113.5	17.4
58	70.0	88.5	68.2	165.1	60.3	60.3	58.7	40.7	15.1	1.6	4.7	116.0	17.4
60	73.2	91.7	71.4	165.1	64.2	63.1	62.6	43.6	15.9	0.5	3.6	119.9	17.4
63	*	98.8	77.8	171.5	66.7	63.1	65.1	43.6	15.9	*	3.2	127.0	17.4
65	*	98.8	77.8	171.5	66.7	63.1	65.1	43.6	15.9	*	3.2	127.0	17.4
68	*	103.2	84.1	171.5	65.1	63.1	63.5	41.3	15.9	*	3.2	131.3	17.4
70	*	103.2	84.1	171.5	65.1	63.1	63.5	41.3	15.9	*	3.2	131.3	17.4
75	*	113.5	92.1	196.9	66.7	63.1	65.1	45.4	17.4	1.3	3.2	145.3	20.6
80	97.9	116.8	95.3	188.9	66.9	65.1	63.8	40.5	*	*	4.5	148.4	20.6
85	104.8	123.2	101.6	206.4	68.3	65.1	65.1	40.5	*	*	3.2	154.5	20.6
90	110.3	129.5	107.1	212.7	68.3	65.1	65.1	40.5	*	*	3.2	158.8	17.4
95	113.5	132.1	110.3	222.3	68.3	65.1	65.1	40.5	*	*	3.2	172.0	17.4
100	119.8	139.7	116.7	228.6	68.3	65.1	65.1	40.5	*	*	3.2	171.7	20.6
105	123.0	142.9	119.8	228.6	68.3	65.1	65.1	40.5	*	*	3.2	174.9	20.6
110	132.5	152.4	129.4	241.3	68.3	65.1	65.1	40.5	*	*	3.2	184.4	20.6
115	132.5	152.4	129.4	241.3	68.3	65.1	65.1	40.5	*	*	3.2	184.4	20.6
120	138.9	160.4	135.7	263.5	68.3	65.1	65.1	40.5	*	*	3.2	192.4	20.6
125	151.6	184.4	148.4	304.8	80.5	75.0	77.3	44.4	*	*	3.2	254.0	20.6
130	157.9	190.8	154.8	311.2	80.5	75.0	77.3	44.4	*	*	3.2	260.0	20.6
135	164.3	203.2	161.1	322.3	80.5	75.0	77.3	44.4	*	*	3.2	265.7	23.8
140	164.3	203.2	161.1	322.3	80.5	75	77.3	44.4	*	*	3.2	265.7	23.8