


HMCS-J30(1648)

Type: Single Cartridge Seal
 Replacement: Crane 1648
 Temperature: -40°C to +260°C
 Pressure: $\leq 6.9\text{Mpa}$
 Speed: $\leq 25\text{m/s}$
 Material: Q1,Q2,U2,T,V,M1,F,G,M

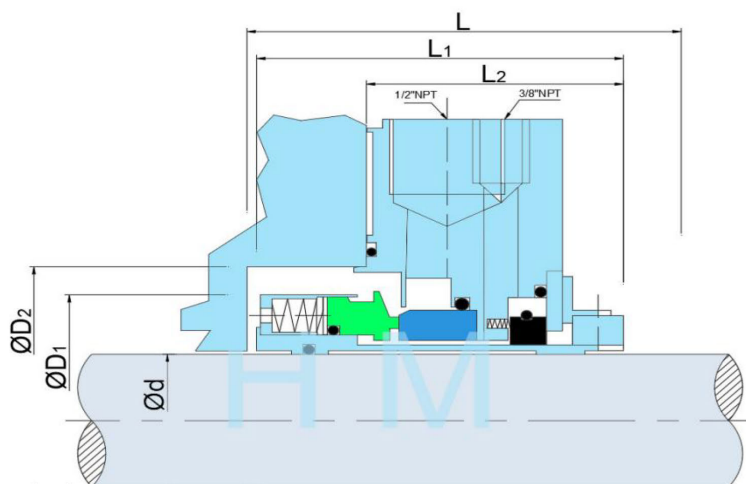

hengmi@mesal.com

d (inch)	D1	D2	L	L1	L2
1.000	2.125	2.500	5.75	3.812	2.562
1.125	2.375	2.750	5.75	4.125	2.562
1.250	2.500	2.875	5.75	4.125	2.562
1.375	2.625	3.000	5.75	4.125	2.562
1.500	2.750	3.125	5.75	4.125	2.562
1.625	3.000	3.375	5.75	4.437	2.562
1.750	3.125	3.500	5.75	4.437	2.562
1.875	3.250	3.625	5.75	4.437	2.562
2.000	3.375	3.750	6.50	4.437	2.562
2.125	3.500	3.875	6.50	4.437	2.562
2.250	3.625	4.000	6.50	4.437	2.625
2.375	3.750	4.125	6.50	4.500	2.625
2.500	3.812	4.187	6.50	4.500	2.625
2.625	3.937	4.312	6.50	4.500	2.625
2.750	4.125	4.500	6.50	4.500	2.781
2.875	4.250	4.625	6.50	4.656	2.781
3.000	4.375	4.750	6.50	4.656	2.781
3.125	4.500	4.875	7.00	4.656	2.781
3.250	4.625	5.000	7.00	4.656	2.781
3.375	4.750	5.125	7.00	4.656	2.781
3.500	4.875	5.250	7.00	4.656	2.781
3.625	5.125	5.500	7.00	4.656	2.781
3.750	5.250	5.625	7.00	4.656	2.781
3.875	5.375	5.750	7.00	4.656	2.781
4.000	5.500	5.875	7.00	4.656	2.781
4.125	5.625	6.000	7.00	4.656	2.781
4.250	5.750	6.125	7.00	4.656	2.781