


HMCS-J28(5620/5629PR)


Type: Double Cartridge Seal
Replacement: Crane 5620/5620PR
Temperature: -40°C to +205°C
Pressure: ≤ 2.1 Mpa
Speed: ≤ 25 m/s
Material: Q1, Q2, U2, T, V, M1, F, G, M



HMCS-J28(5620)

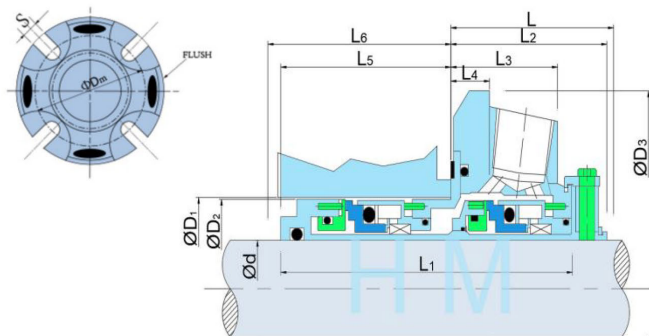

HMCS-J28(5620PR)

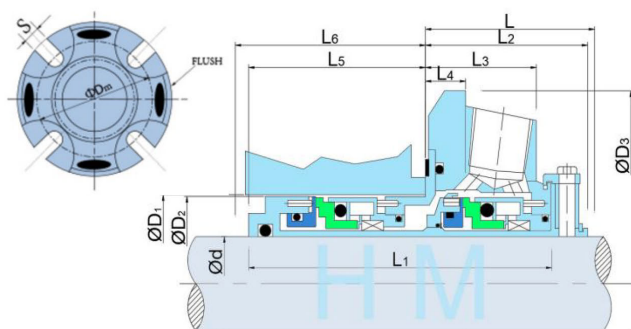

d (mm)	D1		D2	D3	L	L1	L2	L3	L4	L5	L6	S	Dm
	min	max											
24	41.3	48.0	39.7	101.6	50.8	94.1	49.6	34.4	13.5	44.5	47.7	13.3	71.2
25	41.3	48.0	39.7	101.6	50.8	94.1	49.6	34.4	13.5	44.5	47.7	13.3	71.2
28	44.5	51.2	42.9	104.8	54.0	97.8	52.4	36.7	13.5	45.4	48.6	13.3	74.5
30	46.1	56.5	44.5	108	54.0	97.8	52.4	36.7	13.5	45.4	48.6	13.3	81.6
32	47.6	58.3	46.0	108.0	54.0	97.8	52.4	36.7	13.5	45.4	48.6	13.3	81.6
33	50.8	61.5	49.3	111.1	54.0	97.8	52.4	36.7	13.5	45.4	48.6	13.3	84.8
35	50.8	61.5	49.3	111.1	54.0	97.8	52.4	36.7	13.5	45.4	48.6	13.3	84.8
38	57.2	68.1	55.5	123.8	55.6	101.5	54.0	37.8	15.1	47.5	50.7	13.3	91.4
40	60.3	71.4	58.7	127.0	55.6	101.5	54.0	37.8	15.1	47.5	50.7	14.3	95.7
43	63.0	74.1	61.1	133.4	55.6	101.5	54.0	37.8	15.1	47.5	50.7	14.3	98.4
45	63.0	74.1	61.1	133.4	55.6	101.5	54.0	37.8	15.1	47.5	50.7	14.3	98.4
48	66.7	74.1	64.7	133.4	55.6	101.5	54.0	37.8	15.1	47.5	50.7	14.3	98.4
50	70.0	76.6	67.9	139.7	60.3	110.6	58.7	40.7	15.1	51.9	55.0	14.3	101.6
53	73.0	85.3	71.1	148.8	60.3	110.6	58.7	40.7	15.1	51.9	55.0	17.4	113.5
55	75.0	85.3	72.9	148.8	60.3	110.6	58.7	40.7	15.1	51.9	55.0	17.4	113.5
58	76.2	88.5	74.2	165.1	60.3	110.6	58.7	40.7	15.1	51.9	55.0	17.4	116.0
60	79.4	91.7	77.4	165.1	64.2	115.4	62.6	43.6	15.9	52.8	56.0	17.4	119.9
63	85.7	98.8	83.8	171.5	66.7	115.4	65.1	43.6	15.9	50.3	53.5	17.4	127.0
65	85.7	98.8	83.8	171.5	66.7	115.4	65.1	43.6	15.9	50.3	53.5	17.4	127.0
68	92.1	103.2	90.2	171.5	65.1	116.7	63.5	41.2	15.9	53.2	56.4	17.4	131.3
70	92.1	103.2	90.2	171.5	65.1	116.7	63.5	41.2	15.9	53.2	56.4	17.4	131.3
75	101.6	113.5	98.1	196.9	66.7	116.7	65.1	45.4	17.4	51.6	54.8	20.6	145.3
80	105	116.8	102.2	188.9	66.9	119.0	63.8	40.5	*	55.3	58.5	20.6	148.5
85	111.1	123.2	107.9	206.4	68.3	119.0	65.1	40.5	*	54.0	57.2	20.6	154.8
90	117.5	129.5	114.3	212.7	68.3	119.0	65.1	40.5	*	54.0	57.2	17.4	158.8
95	120.0	132.1	117.5	222.3	68.3	119.0	65.1	40.5	*	54.0	57.2	17.4	172.0
100	127.0	139.7	123.8	228.6	68.3	119.0	65.1	40.5	*	54.0	57.2	20.6	171.7
105	130.2	142.9	127.0	228.6	68.3	119.0	65.1	40.5	*	54.0	57.2	20.6	174.9
110	139.7	152.4	136.5	241.3	68.3	119.0	65.1	40.5	*	54.0	57.2	20.6	184.4
115	139.7	152.4	136.5	241.3	68.3	119.0	65.1	40.5	*	54.0	57.2	20.6	184.4
120	146.1	160.4	142.9	263.5	68.3	119.0	65.1	40.5	*	54.0	57.2	20.6	192.4
125	171.7	184.4	155.6	304.8	68.5	140.1	77.3	44.4	*	62.8	66.0	20.6	254.0
130	178.1	190.8	161.9	311.2	80.5	140.1	77.3	44.4	*	62.8	66.0	20.6	260.4
135	190.5	203.2	168.3	322.3	80.5	140.1	77.3	44.4	*	62.8	66.0	20.8	266.7
140	190.5	203.2	168.3	322.3	80.5	140.1	77.3	44.4	*	62.8	66.0	20.8	266.7