


HMCS-C13(HVS)



Type: Single Cartridge Seal
Replacement: Chesterton HVS
Temperature: -40 to +204°C
Pressure: $\leq 4.0\text{Mpa}$
Speed: $\leq 20\text{m/s}$
Material: Q1,Q2,A,B,U1,U2,P,
E,V,T,F,G,T2,M5

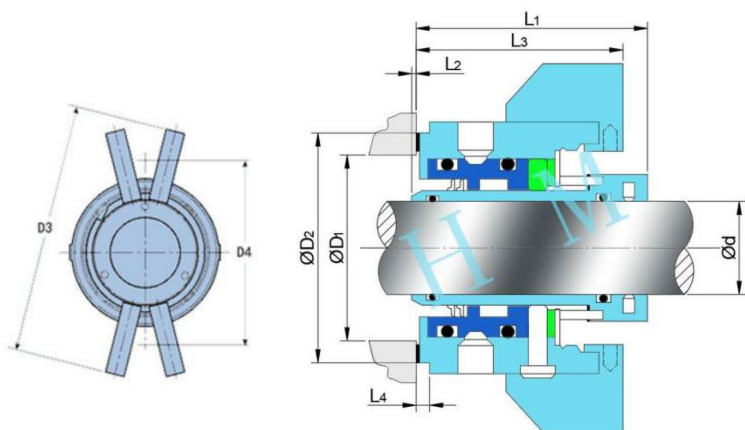

hengmi@mes seal.com

d (mm)	D2	D1		D3 max	D4(min)				L1	L2 min	L3	L4
		min	max		8 mm	10mm	12mm	20 mm				
25	59.9	37.7	40.6	120.8	72.8	74.8	76.8	*	58	3.6	52.2	0.18
28	63.7	40.8	49.8	124.7	76.4	78.4	80.4	*	58	3.6	52.2	0.18
30	63.7	40.8	49.8	124.7	76.4	78.4	80.4	*	58	3.6	52.2	0.18
32	67.1	44.2	54.4	128.1	79.8	81.8	83.8	87.8	63	4.9	52.2	0.18
35	70.0	40.8	56.4	131.0	82.7	84.7	86.7	90.7	63	4.9	52.2	0.18
40	71.8	52.2	57.9	125.5	87.8	89.8	91.8	95.8	63	4.9	52.2	0.18
45	76.8	57.2	62.9	130.5	92.8	94.8	96.8	100.8	63	4.9	52.2	0.18
50	82.6	63.1	66.8	147.2	98.6	100.6	102.6	106.6	63	4.9	52.2	0.18
53	85.8	66.2	84.1	150.1	101.8	103.8	105.8	109.8	63	4.9	52.2	0.18
55	89.0	69.4	75.4	156.9	104.9	106.9	135.1	137.1	63	4.9	52.2	0.18
60	110.4	74.1	93.9	172.6	124.4	126.4	128.4	132.4	63	4.9	54.1	0.18
65	105.6	77.2	91.9	176.4	127.5	129.5	131.5	135.5	63	4.9	53.5	0.18
70	110.4	81.9	96.8	181.2	*	*	136.4	140.4	63	4.9	53.5	0.18
75	131.0	89.2	115.7	188.4	*	*	143.5	147.5	63	4.9	52.4	0.00
80	136.0	94.2	120.9	193.4	*	*	148.5	152.5	63	4.9	52.4	0.00
85	143.3	100.8	113.8	215	*	*	156.8	160.8	63	4.9	52.4	0.00
100	157.6	115.8	141.1	214.9	*	*	170.1	174.1	63	4.9	52.4	0.00