



HMCS-B08(CARTEX-SN)


Type : Single Cartridge Seal
 Replacement: Burgmann CARTEX- SN
 Temperature: -20°C to +220°C
 Pressure : $\leq 2.5\text{Mpa}$
 Speed: $\leq 10\text{m/s}$
 Material : Q1,Q2,U2,T,V,M1,F,G,M

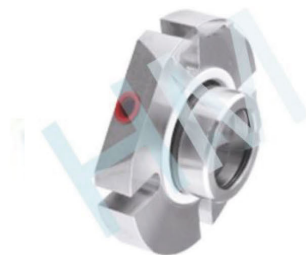

HMCS-B08(CARTEX-SN)-A (use Mechined cover)

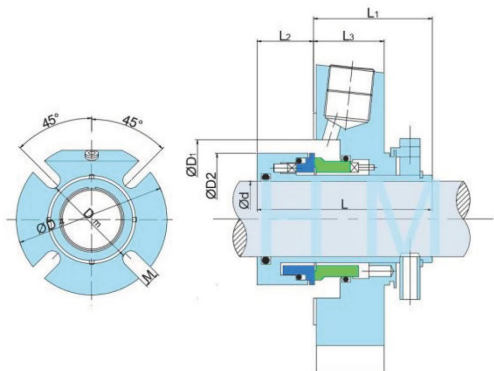

HMCS-B08(CARTEX-SN)-B (use cast cover)

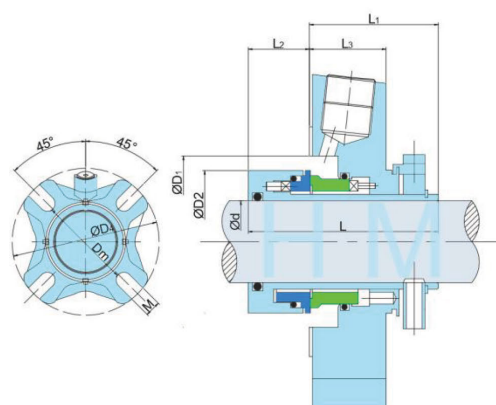

d (mm)	D1		D2	D4	Dm	L	L1	L2	L3	M
	Min	Max								
25	44.0	51.5	43.0	105	62	67	42.4	24.6	25.4	13.2
28	47.0	52.0	46.0	105	62	67	42.4	24.6	25.4	13.2
30	49.0	56.0	48.0	106	65	67	42.4	24.6	25.4	13.2
32	51.0	57.0	49.8	108	67	67	42.4	24.6	25.4	13.2
33	51.0	57.0	49.8	108	67	67	42.4	24.6	25.4	13.2
35	54.0	61.5	53.0	113	70	67	42.4	24.6	25.4	13.2
38	57.0	66.0	56.0	123	75	67	42.4	24.6	25.4	13.2
40	59.0	68.0	58.0	123	75	67	42.4	24.6	25.4	14.2
42	61.5	69.0	60.5	133	80	67	42.4	24.6	25.4	14.2
43	61.5	70.5	60.5	133	80	67	42.4	24.6	25.4	14.2
45	64.0	73.0	62.5	138	81	67	42.4	24.6	25.4	14.2
48	67.0	75.0	65.6	138	84	67	42.4	24.6	25.4	14.2
50	69.0	78.0	68.0	148	87	67	42.4	24.6	25.4	14.2
53	73.0	87.0	72.0	148	97	67	42.4	24.6	25.4	18.0
55	74.0	83.0	73.0	148	90	67	42.4	24.6	25.4	18.0
60	79.0	91.0	78.0	157	102	67	42.4	24.6	25.4	18.0
65	85.7	98.5	84.8	163	109	67	42.4	24.6	25.4	18.0
70	95.0	108.0	93.0	178	118	67	42.4	24.6	25.4	18.0
75	101.6	118.0	100.0	190	129	84	57.4	26.6	28.0	18.0
80	108.0	124.0	106.4	196	135	84	57.4	26.6	28.0	18.0
85	111.	128.0	109.5	198	139	84	57.4	26.6	28.0	22.0
90	117.5	135.0	115.9	205	145	84	57.4	26.6	28.0	22.0
95	120.7	138.0	119.1	208	148	84	57.4	26.6	28.0	22.0
100	127.0	144.0	125.4	218	154	84	57.4	26.6	28.0	22.0