


HMCS-J24(5610Q)

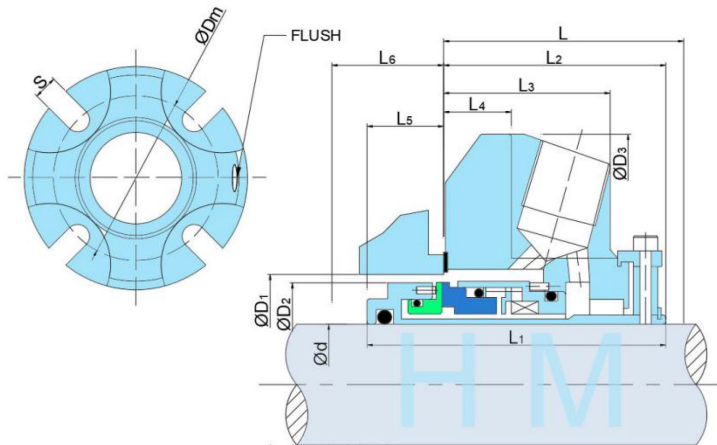

Type: Single Cartridge Seal
Replacement: Crane 5610Q
Temperature: -50°C to +204°C
Pressure: ≤2.0Mpa
Speed: ≤23m/s
Material: B,A,Q1,Q2,T,V,K,F,G,M

d (mm)	D1		D2	D3	L	L1	L2	L3	L4	L5	L6	Dm	S
	min	max											
24	41.3	48.0	39.7	101.6	50.8	65.4	49.6	34.4	13.5	15.8	18.9	71.2	13.3
25	41.3	48.0	39.7	101.6	50.8	65.4	49.6	34.4	13.5	15.8	18.9	71.2	13.3
28	44.5	51.2	42.9	104.8	54.0	67.3	52.4	36.7	13.5	15.0	18.1	74.5	13.3
30	46.1	56.5	44.5	108.0	54.0	65.1	52.4	36.7	13.5	12.7	15.9	79.9	13.3
32	47.6	58.3	46.0	108.0	54.0	69.3	52.4	36.7	13.5	16.9	20.1	81.6	13.3
33	50.8	61.5	49.3	111.1	54.0	69.3	52.4	36.7	13.5	16.9	20.1	84.8	13.3
35	50.8	61.5	49.3	111.1	54.0	69.3	52.4	36.7	13.5	16.9	20.1	84.8	13.3
38	57.2	68.1	55.5	123.8	55.5	69.7	54.0	37.8	15.1	15.7	18.9	91.4	13.3
40	60.3	71.4	58.7	127.0	55.5	69.7	54.0	37.8	15.1	15.7	18.9	95.7	14.3
43	63.0	74.1	61.1	133.4	55.5	69.7	54.0	37.8	15.1	15.7	18.9	98.4	14.3
45	63.0	74.1	61.1	133.4	55.5	69.7	54.0	37.8	15.1	15.7	18.9	98.4	14.3
48	66.7	74.1	64.7	133.4	55.5	69.7	54.0	37.8	15.1	15.7	18.9	98.4	14.3
50	70.0	76.6	67.9	139.7	60.3	75.3	58.7	40.7	27	16.5	19.7	101.6	14.3
53	73.0	85.3	71.1	148.8	60.3	75.3	58.7	40.7	15.1	16.5	19.7	113.5	17.4
55	75.0	85.3	72.9	148.8	60.3	75.3	58.7	40.7	15.1	16.5	19.7	113.5	17.4
58	76.2	88.5	74.2	165.1	60.3	75.3	58.7	40.7	15.1	16.5	19.7	116	17.4
60	79.4	91.7	77.4	165.1	64.2	77.8	62.6	43.6	15.9	15.2	18.3	119.9	17.4
63	85.7	98.8	83.8	171.5	66.7	75.7	65.1	43.6	15.9	10.6	13.8	127	17.4
65	85.7	98.8	83.8	171.5	66.7	75.7	65.1	43.6	15.9	10.6	13.8	127.0	17.4
68	92.1	103.2	90.2	171.5	65.1	78.4	63.5	41.3	15.9	14.9	18.1	131.3	17.4
70	92.1	103.2	90.2	171.5	65.1	78.4	63.5	41.3	15.9	14.9	18.1	131.3	17.4
75	99.9	113.5	98.1	196.9	66.7	78.4	65.1	45.4	17.4	13.4	16.5	145.3	20.6
80	104.8	116.8	102.2	188.9	66.9	80.2	63.8	40.5	*	14.8	18	148.5	20.6
85	111.1	123.2	107.9	206.4	68.3	80.2	65.1	40.5	*	15.1	18.3	154.8	20.6
90	117.5	129.5	114.3	212.7	68.3	80.2	65.1	40.5	*	15.1	18.3	158.8	17.4
95	120.0	132.1	117.5	222.3	68.3	80.2	65.1	40.5	*	15.1	18.3	172.0	17.4
100	127.0	139.7	123.8	228.6	68.3	80.2	65.1	40.5	*	15.1	18.3	171.7	20.6
105	130.2	142.9	127	228.6	68.3	80.2	65.1	40.5	*	15.1	18.3	174.9	20.6
110	139.7	152.4	136.5	241.3	68.3	80.2	65.1	40.5	*	15.1	18.3	184.4	20.6
115	139.7	152.4	136.5	241.3	68.3	80.2	65.1	40.5	*	15.1	18.3	184.4	20.6
120	146.1	160.4	142.9	263.5	68.3	80.2	65.1	40.5	*	15.1	18.3	192.4	20.6
125	158.8	184.4	155.6	304.8	80.5	91.7	77.3	91.4	*	14.4	17.6	254	20.6
130	165.1	190.8	161.9	311.2	80.5	91.7	77.3	91.4	*	14.4	17.6	260.0	20.6
135	171.5	203.2	168.3	322.3	80.5	91.7	77.3	91.4	*	14.4	17.6	266.7	23.8
140	171.5	203.2	168.3	322.3	80.5	91.7	77.3	91.4	*	14.4	17.6	266.7	23.8