


HMCS-J53(8B)



Type: Cartridge Seal
Replacement: Crane 8B
Temperature: -40 to +260°C
Pressure: ≤103.5 Bar
Speed: ≤25m/s
Material : Q1,Q2,U2,T,V,M1,F,G,M

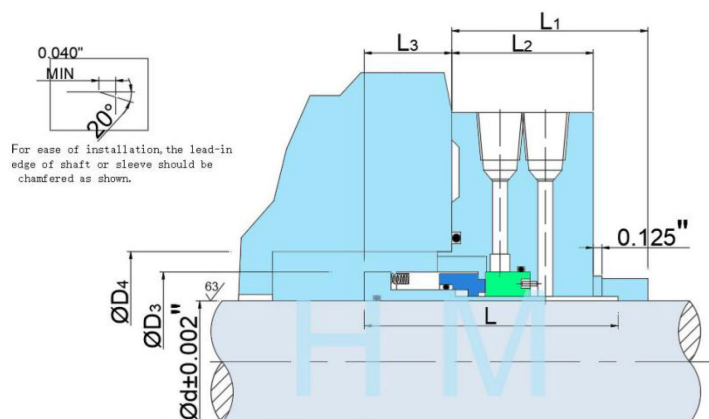

hengmi@mesel.com

d (inch)	D3	D4	L	L1	L2	L3
1.000	2.125	2.312	4.250	2.875	1.750	1.843
1.125	2.250	2.437	4.250	2.875	1.750	1.843
1.250	2.375	2.562	4.250	2.875	1.750	1.843
1.375	2.500	2.687	4.312	2.875	1.750	1.906
1.500	2.625	2.812	4.312	2.875	1.750	1.906
1.625	2.750	2.937	4.312	2.875	1.750	1.906
1.750	2.875	3.062	4.312	2.875	1.750	1.906
1.875	3.000	3.187	4.375	2.875	1.750	1.968
2.000	3.125	3.312	4.375	2.875	1.750	1.968
2.125	3.375	3.562	4.562	3.000	1.875	2.031
2.250	3.500	3.687	4.562	3.000	1.875	2.031
2.375	3.625	3.812	4.625	3.000	1.875	2.093
2.500	3.750	3.937	4.625	3.000	1.875	2.093
2.625	3.875	4.062	4.625	3.000	1.875	2.093
2.750	4.000	4.187	4.625	3.000	1.875	2.093
2.875	4.125	4.312	4.781	3.000	1.875	2.250
3.000	4.250	4.437	4.781	3.000	1.875	2.250
3.125	4.562	4.750	4.968	3.250	2.125	2.187
3.250	4.687	4.875	4.968	3.250	2.125	2.187
3.375	4.812	5.000	4.968	3.250	2.125	2.187
3.500	4.937	5.125	4.968	3.250	2.125	2.187
3.625	5.062	5.250	4.968	3.250	2.125	2.187
3.750	5.187	5.375	4.968	3.250	2.125	2.187
3.875	5.312	5.500	4.968	3.250	2.125	2.187
4.000	5.437	5.625	4.968	3.250	2.125	2.187
4.125	5.750	6.000	5.156	3.250	2.125	2.375
4.250	5.875	6.125	5.156	3.250	2.125	2.375